

MATERIAL


Insulator: Nylon 9T, UL94V-0, Black

Contact Pin: Brass

ORDER INFORMATION


5PH1RDA25-1XXXXNXXU-AB-C-00

1: Single Row	No. of contacts Per Row(02~40)	G0: Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0: Tin Plated	S0: Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u" TE: Tin 200u"	N: Non Type N: W/O Peg	U: RoHS+Hi-Temp.	EX: 060030039 A: 6.0 B: 3.0 C: 3.9
					X: Box C: Tube With Cap R: T/R With Cap M: T/R With Mylar	

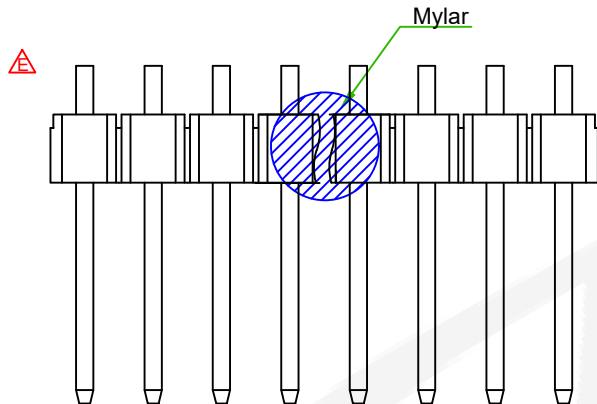


5PH1RDA25-1XXXXNXXU-XXXXXXXXXX-00

M: T/R With Mylar



Recommended PCB Layout
(PCB TOLERANCE ±0.1)

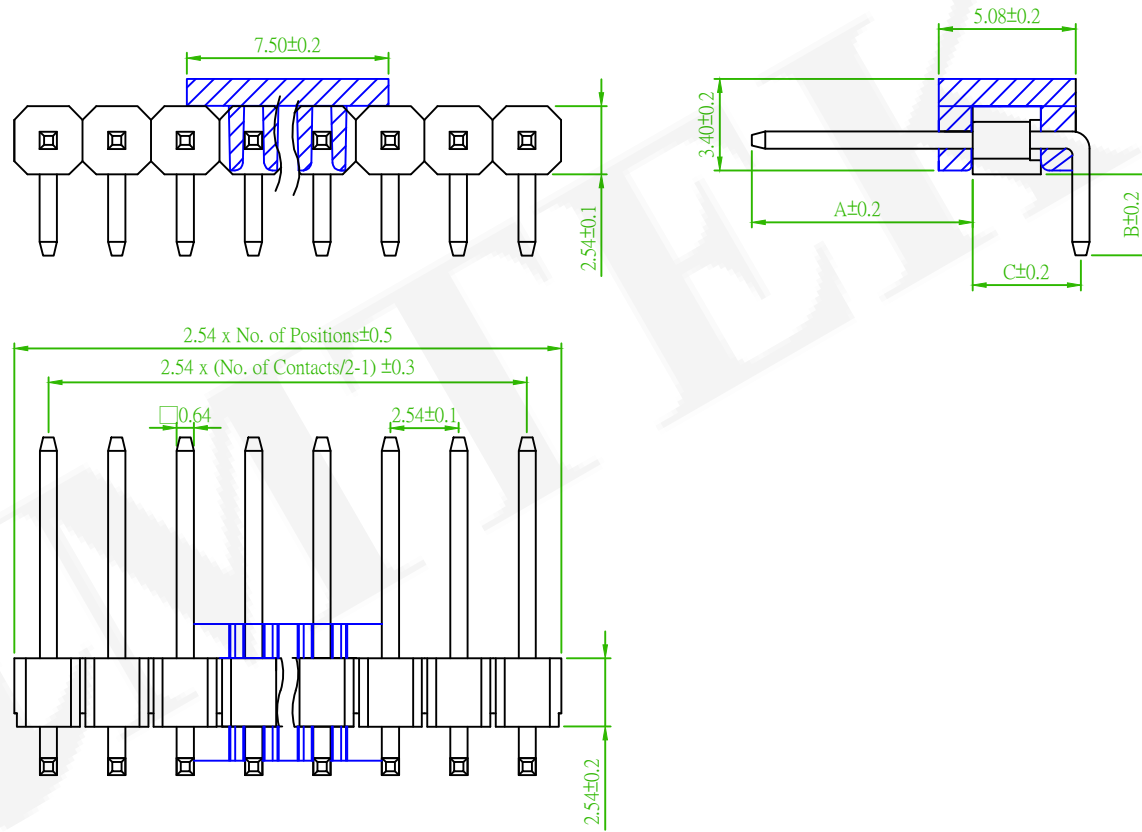

Old Part No. : PH1RD25-1XX-U

△x2	ECN NO.:210916 Revise the drawing	Alice	2021/10/6
△	Add : M: T/R With Mylar	David	2020/02/12
△	Add the Package option	Eric	2019/02/20
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

AMTEK
糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.54mm				頁數 Page	1/1
品號 PART NO.	5PH1RDA25-1XXXXNXXU-XXXXXXXXXX-00				繪圖 DRAWN	Mia 2015/08/19
圖號 DRAWING NO.	GN016-GA142	版本 REV.	F	核對 CHECKED	Josh 2019/02/20	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/02/20	
公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	.X° ± 3	單位 UNIT	mm	THIRD ANGLE PROJECTION	