





MATERIAL ⚠

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION

5 P H 1 R D A 7 4 - 2 X X X X N N X U - A B 000 - 0 0

2: Dual Row	No. of contacts Per Row(02~40)	G0: Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0: Tin Plated	S0: Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u" TE: Tin 200u"	N: Non Type N: W/O Peg	U: RoHS +Hi-Temp. X: Box B: Bag C: Tube With Cap	EX: 060030000 A: 6.0 B: 3.0
-------------	-----------------------------------	---	--	---------------------------	--	-----------------------------------

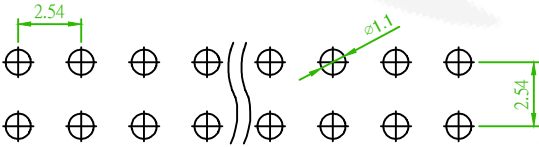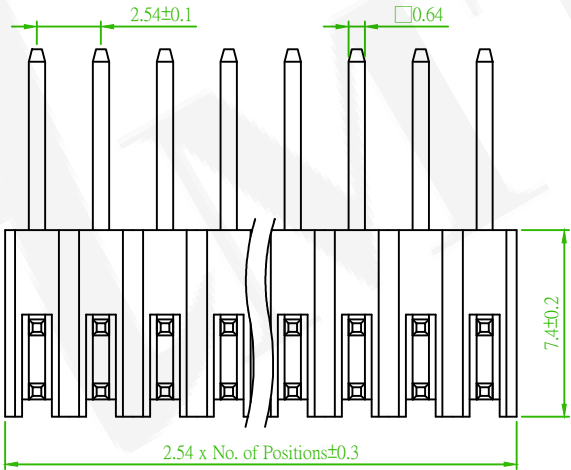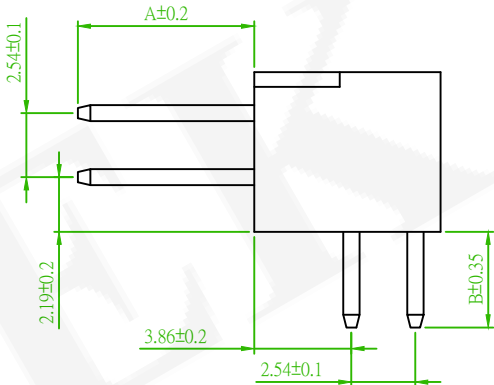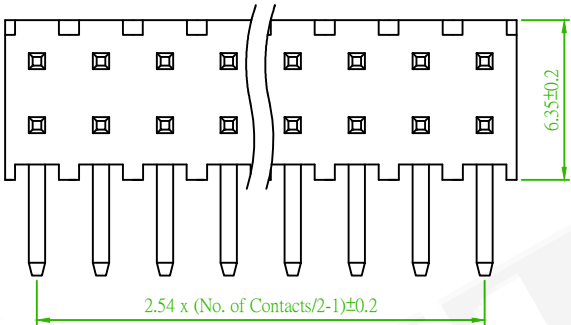

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

Old Part No.: PH1R74-2XX-U

⚠	ECN NO.: 211018 Revise the drawing	Alice	2021/11/16
⚠	Modify order information	B	2017/01/25 Gary
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.54mm				頁數 Page	1/1
品號 PART NO.	5PH1RDA74-2XXXXNXXU -XXXXXX000-00				繪圖 DRAWN	Mia 2015/08/19
圖號 DRAWING NO.	GN016-GA147	版本 REV.	C	核對 CHECKED	John 2015/08/19	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/19	
公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	.X° ± 3	單位 UNIT	mm	THIRD ANGLE PROJECTION	