

MATERIAL

Insulator: Nylon 9T, UL 94V-0
Contact Pin: Brass

ORDER INFORMATION

5 P H 1 R M A 2 5 - 1 X X X X

1:Single Row

No. of contacts
Per Row(02~40)

G0:Gold Flash
GA:Au 5u"
GB:Au 10u"
GC:Au 20u"
GD:Au 30u"
T0:Tin Plated

S0:Selective Au
SA:Selective Au 5u"
SB:Selective Au 10u"
SC:Selective Au 20u"
SD:Selective Au 30u"
TE:Tin 200u"


A:A Type
B:B Type

N:W/O Peg


R:T/R With Cap
H:T/R W/O Cap
C:Tube With Cap
T:Tube W/O Cap

U:RoHS
+Hi-Temp.


EX:060050033
A:6.0
B:5.0
C:3.3

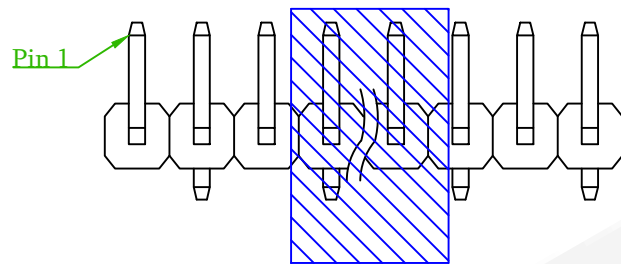

A Type

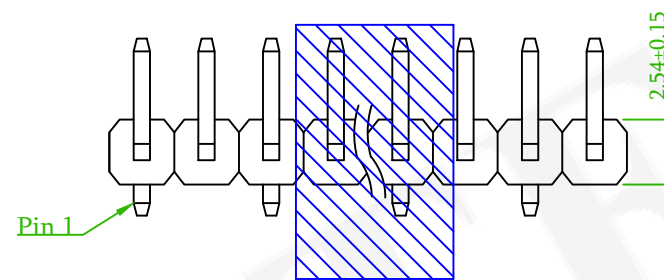



B Type

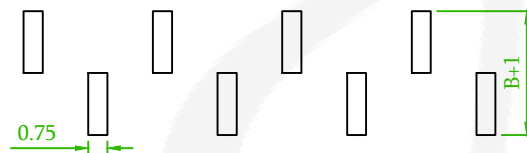

A Type



B Type

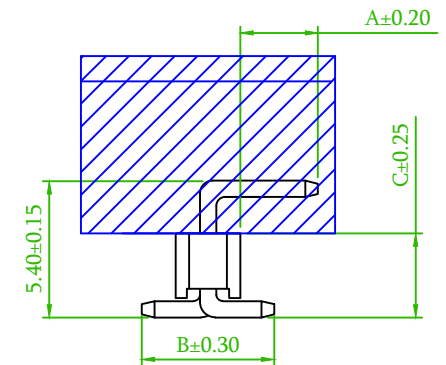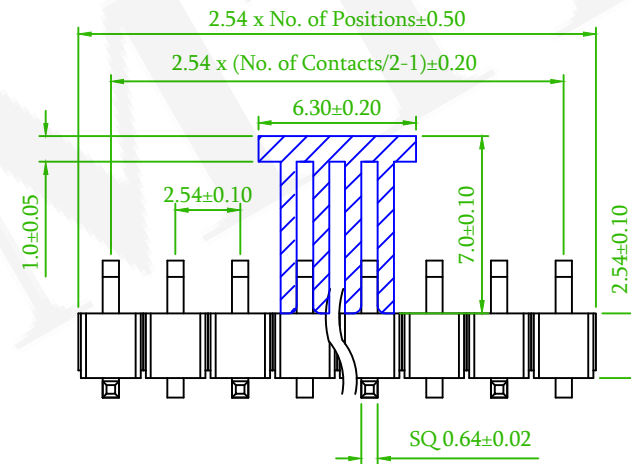

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No. : PH1RM25-1XX-U

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 2.54mm SMT TYPE PLASTIC HEIGHT 2.54mm PLANE BENDING			頁數 Page	1/1
	品號 PART NO.	5PH1RMA25-1XXXXNXXU -XXXXXXXXXX-00			繪圖 DRAWN	Jeff 2016/09/19
	圖號 DRAWING NO.	GN016-GA152	版本 REV.	C	核對 CHECKED	Johnny 2016/09/19
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/09/19
	公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION	

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
 1	ECN NO.:211018 Revise the drawing	Alice	2021/11/16
	Modify order information	B	2017/01/25 Gary