

MATERIAL

Insulator: Nylon 9T, UL 94V-0
Contact Pin: Brass

ORDER INFORMATION

5 P H 1 R M A 2 5 - 2 X X X X

2:Dual Row

No. of contacts
Per Row(02~40)

G0:Gold Flash

GA:Au 5u"

GB:Au 10u"

GC:Au 20u"

GD:Au 30u"

T0:Tin Plated

S0:Selective Au

SA:Selective Au 5u"

SB:Selective Au 10u"

SC:Selective Au 20u"

SD:Selective Au 30u"

TE:Tin 200u"

N N X U - A B C - 0 X

N:Non Type

N:W/O Peg

U:RoHS
+Hi-Temp.

R:T/R With Cap

H:T/R W/O Cap

C:Tube With Cap

T:Tube W/O Cap

EX:060075033

A:6.0

B:7.5

C:3.3


DIM D

00:9.70




01:8.52



AMTEK 耀德
2022.01.05
Released DCC

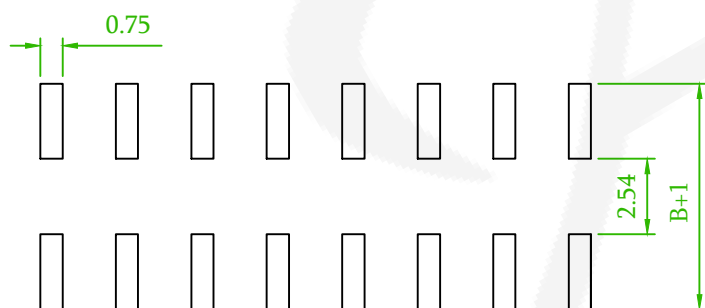

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

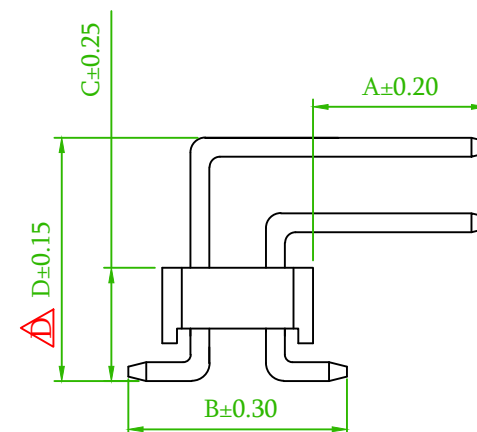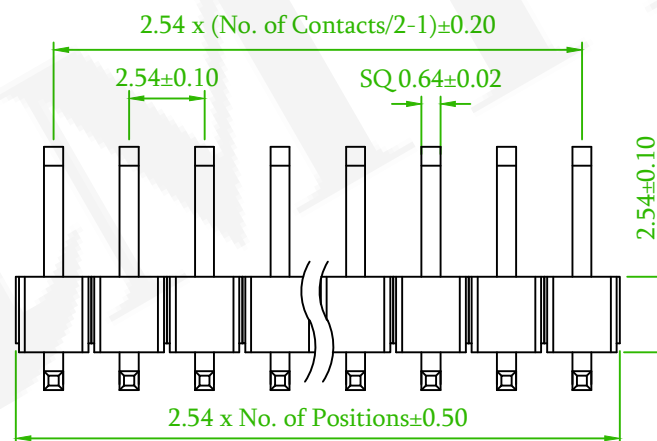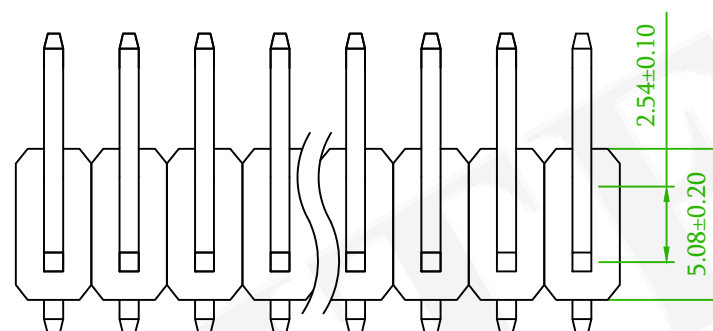

Old Part No. : PH1RM25-2XX-U

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 2.54mm SMT TYPE PLASTIC HEIGHT 2.54mm PLANE BENDING				頁數 Page	1/1
	品號 PART NO.	 5PH1RMA25-2XXXXNXXU -XXXXXXXXXX-0X				繪圖 DRAWN	Mia 2015/08/21
	圖號 DRAWING NO.	GN106-GA153	版本 REV.	E	核對 CHECKED	John 2015/08/21	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/21	
	公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

	ECN NO.:211018 Revise the drawing	Alice	2021/11/16
	Add the D Dim	D	2017/06/07 Mia
	Modify order information	C	2017/01/25 Gary
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE