




MATERIAL

Insulator: Nylon 9T, UL 94V-0 Black
Contact Pin: Brass

ORDER INFORMATION

5 P H 1 R U A 1 5 - 1 X X X X N N X U - A B C - 0 0

1: Single Row	No. of contacts Per Row(02~40)	G0: Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0: Tin Plated	S0: Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u" TE: Tin 200u"	N: Non Type N: W/O Peg	X: Box C: Tube With Cap	U: RoHS +Hi-Temp.	EX: 060030040 A: 6.0 B: 3.0 C: 4.04
---------------	-----------------------------------	---	--	---------------------------	----------------------------	----------------------	--

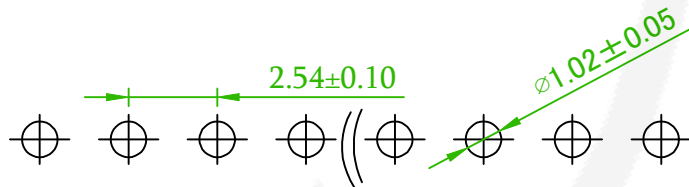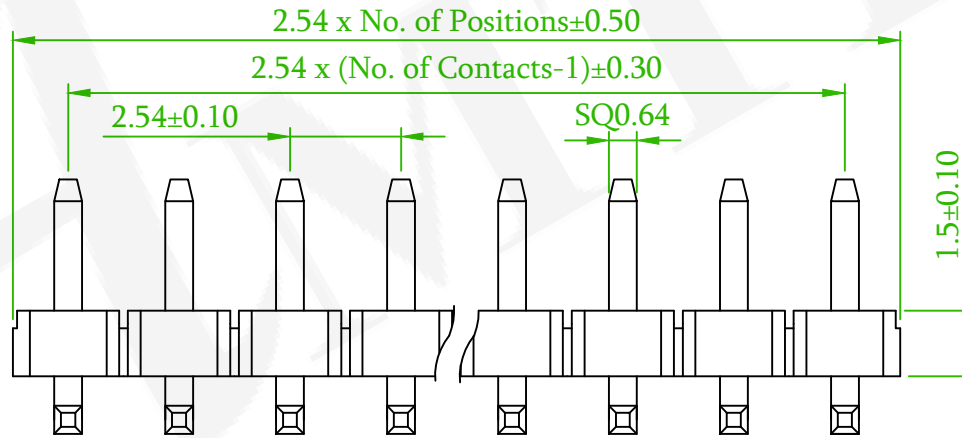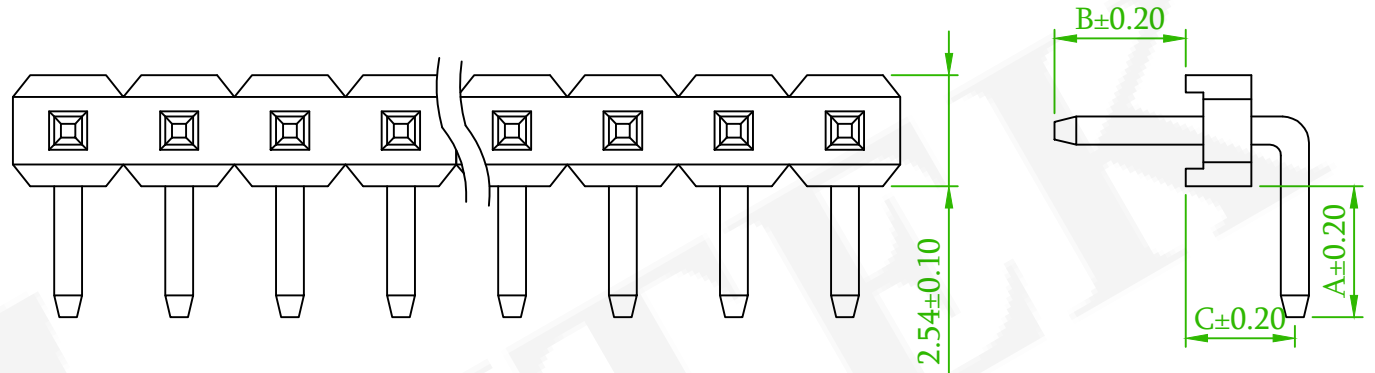

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No. :PH1RU15-1XX-U

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 2.54mm PLASTIC HEIGHT 1.5mm U TYPE				頁數 Page	1/1
	品號 PART NO.	5PH1RU15-1XXXXNXXU -XXXXXXXXXX-00				繪圖 DRAWN	Mia 2017/01/16
	圖號 DRAWING NO.	GN015-MC223	版本 REV.	C	核對 CHECKED	Jonny 2016/01/16	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/01/16	
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
 1	ECN NO.:211018 Revise the drawing	Alice	2021/11/16
	Modify order information	B	2017/01/25 Gary