

MATERIAL





Insulator: Nylon 9T,UL94V-0,Black

Contact Pin: Brass

ORDER INFORMATION


5 P H 1 R U A 1 5 - 2 X X X X N N X U - A B C - 0 0

2: Dual Row	No. of contacts Per Row(02~40)	G0: Gold Flash GA: Au 5u"	S0: Selective Au SA: Selective Au 5u"	N: Non Type	U: RoHS	EX: 060030039 A: 6.0 B: 3.0 C: 3.9
		GB: Au 10u"	SB: Selective Au 10u"	N: W/O Peg	X: Box B: Bag C: Tube With Cap	
		GC: Au 20u"	SC: Selective Au 20u"			
		GD: Au 30u"	SD: Selective Au 30u"			
		T0: Tin Plated	TE: Tin 200u"			

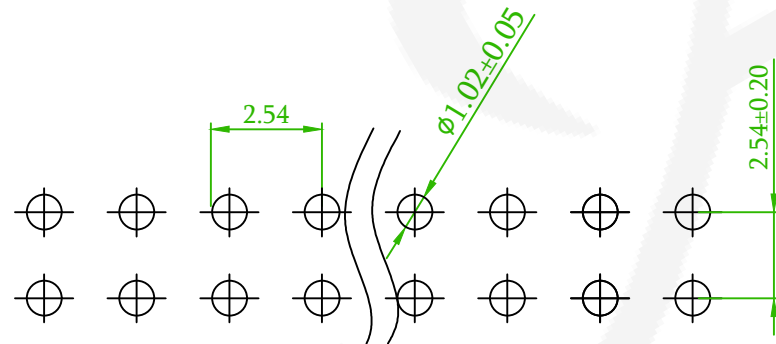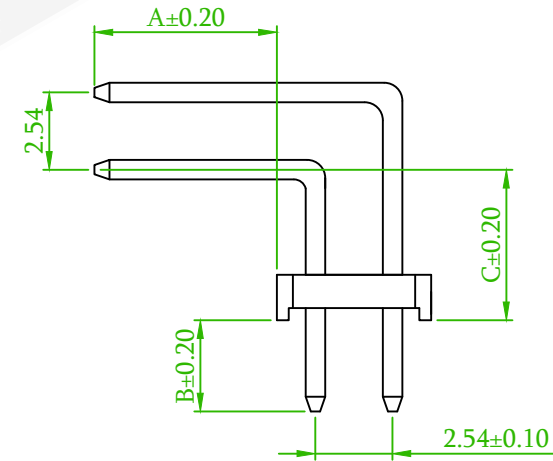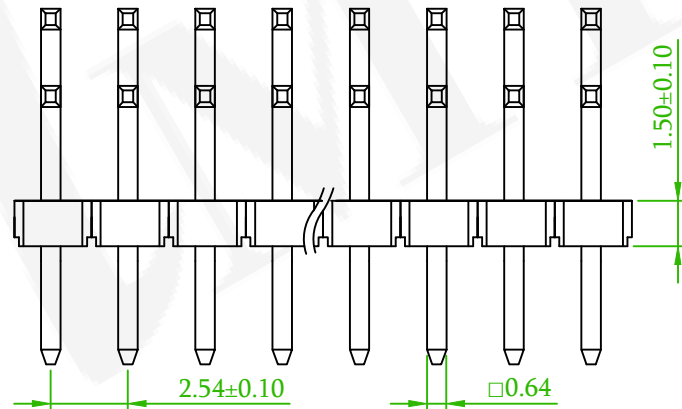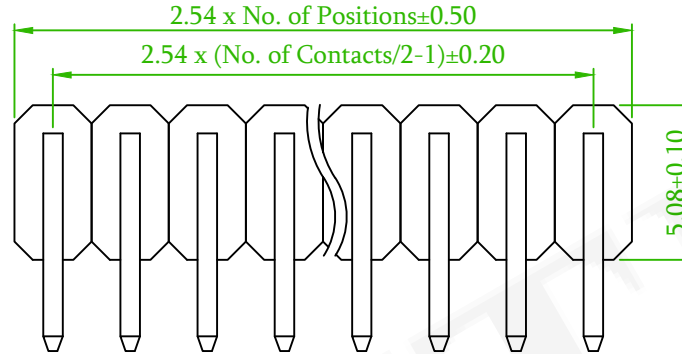

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

Old Part No. : PH1RU15-2XX-U



品名 TITLE	PIN HEADER 2.54mm PLASTIC HEIGHT 1.5mm U TYPE				頁數 Page	1/1
品號 PART NO.	5PH1RUA15-2XXXXNNXU -XXXXXXXXXX-00				繪圖 DRAWN	Nick 2019/07/08
圖號 DRAWING NO.	GN016-NI256	版本 REV.	B	核對 CHECKED	Josh 2019/07/08	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/07/08	
公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	.X° ± 3	單位 UNIT	mm	THIRD ANGLE PROJECTION	

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
B x2	ECN NO.: 210916 Revise the drawing	Alice	2021/10/8