

MATERIAL

Insulator: Nylon 9T, UL 94V-0 Black
Contact Pin: Brass





ORDER INFORMATION

5 P H 1 R U A 1 7 - 1 X X X X

1:Single Row	No. of contacts Per Row(02~40)	G0:Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0: Tin Plated	S0: Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u" TE: Tin 200u"
--------------	-----------------------------------	--	--

N N X U - A B C - 0 0

N: Non Type	U: RoHS +Hi-Temp.	EX: 060030040 A: 6.0 B: 3.0 C: 4.04
N: W/O Peg	X: Box C: Tube With Cap	B: Bag

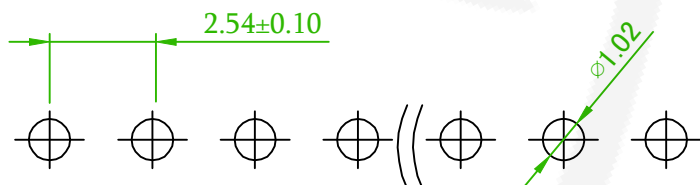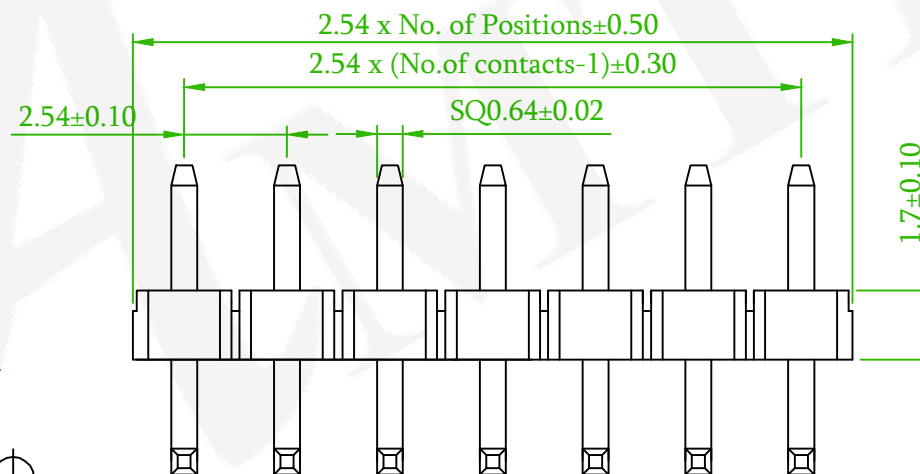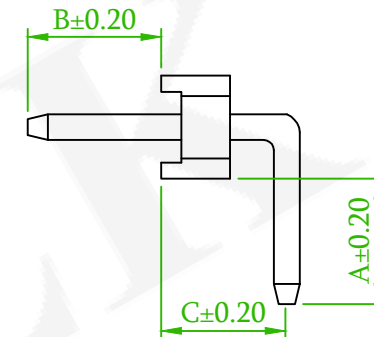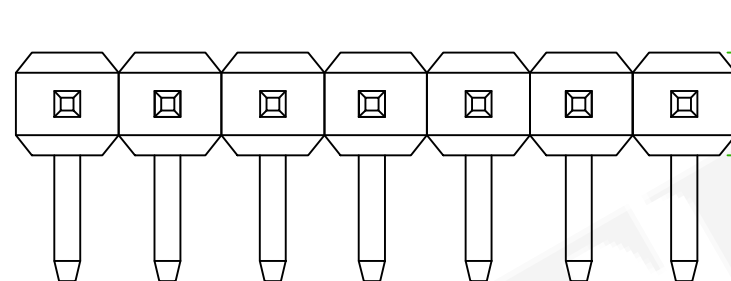

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No. : PH1RU17-1XX-U

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 2.54mm U TYPE PLASTIC HEIGHT 1.7mm				頁數 Page	1/1
	品號 PART NO.	5PH1RUA17-1XXXXNNXU -XXXXXXXXXX-00				繪圖 DRAWN	Jeff 2016/09/19
	圖號 DRAWING NO.	GN016-GA156	版本 REV.	C	核對 CHECKED	Johnny 2016/09/19	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/09/19	
	公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
	ECN NO.:211018 Revise the drawing	Alice	2021/11/16
	Modify order information	B	2017/01/25 Gary