

MATERIAL

Insulator: Nylon 9T, UL 94V-0 Black

Contact Pin: Brass

ORDER INFORMATION

5 P H 1 R U A 1 7 - 2 X X X X N N X U - A B C - 0 0

2: Dual Row

No. of contacts
Per Row(02~40)

G0: Gold Flash

GA: Au 5u"

GB: Au 10u"

GC: Au 20u"

GD: Au 30u"

T0: Tin Plated

S0: Selective Au

SA: Selective Au 5u"

SB: Selective Au 10u"

SC: Selective Au 20u"

SD: Selective Au 30u"

TE: Tin 200u"

N: Non Type

N: W/O Peg

X: Box

B: Bag

C: Tube With Cap

U: RoHS
+Hi-Temp.

EX: 060030040

A: 6.0

B: 3.0




C: 4.04




AMTEK 耀德

2022.01.05


Released DCC

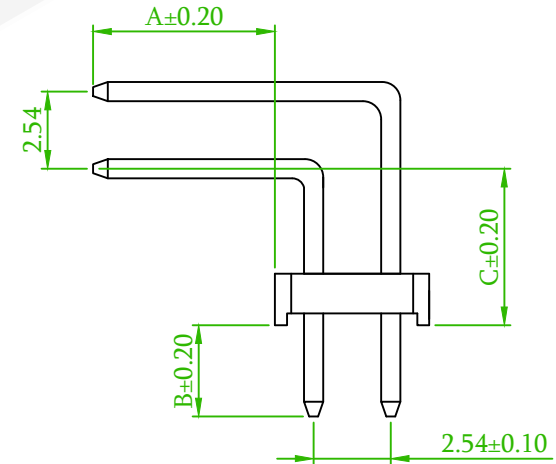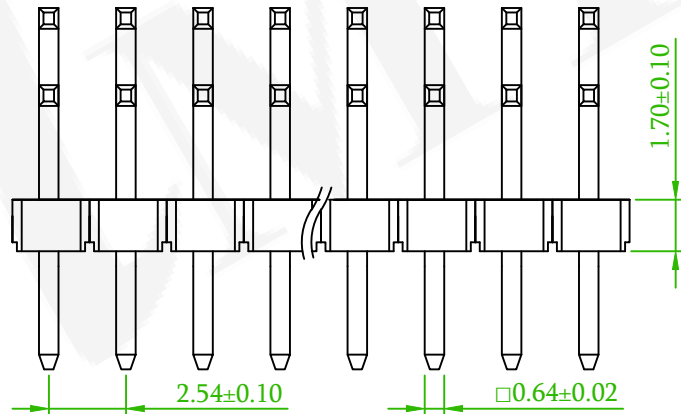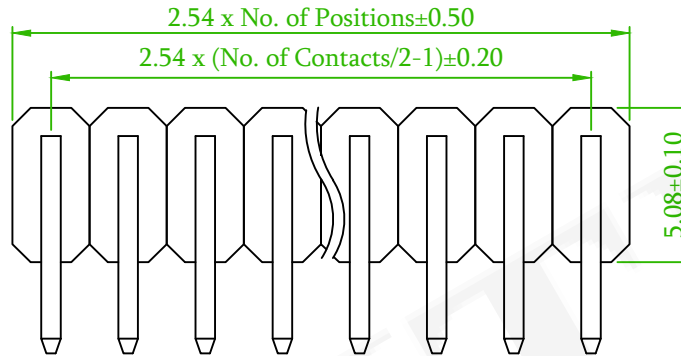

Old Part No.: PH1RU17-2XX-U

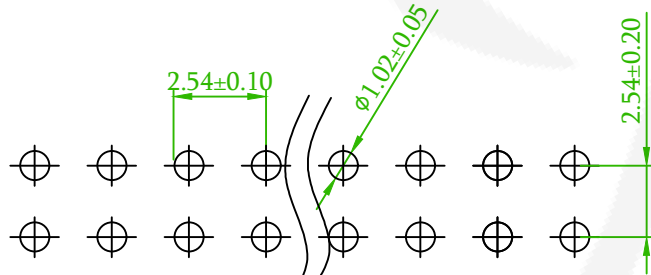

Recommended PCB Layout
(PCB TOLERANCE ±0.05)



品名 TITLE	PIN HEADER 2.54mm PLASTIC HEIGHT 1.7mm U TYPE				頁數 Page	1/1
品號 PART NO.	5PH1RUA17-2XXXXNNXU -XXXXXXXXXX-00				繪圖 DRAWN	Mia 2016/11/10
圖號 DRAWING NO.	GN046-MC042	版本 REV.	C	核對 CHECKED	Jonny 2016/11/10	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/11/10	
公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	.X° ± 3	單位 UNIT	mm	THIRD ANGLE PROJECTION	

1

ECN NO.: 211018 Revise the drawing

Alice

2021/11/16

Modify order information

B

2017/01/25
Gary

REV.

ECN NO. OR DESCRIPTION

REVISED

DATE