

MATERIAL

Insulator: Nylon 9T, UL 94V-0 
Contact Pin: Brass 


ORDER INFORMATION

5 P H 1 R U A 2 5 - 1 X X X X N N X U - A B C - 0 0

1:Single Row	No. of contacts Per Row(02~40)	G0:Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0: Tin Plated	S0: Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u" TE: Tin 200u"	N: Non Type N: W/O Peg	U: RoHS X: Box B: Bag C: Tube With Cap	EX: 0600030040 A: 6.0 B: 3.0 C: 4.04
--------------	-----------------------------------	--	--	---------------------------	---	---



AMTEK 耀德
2021.10.29
Released DCC

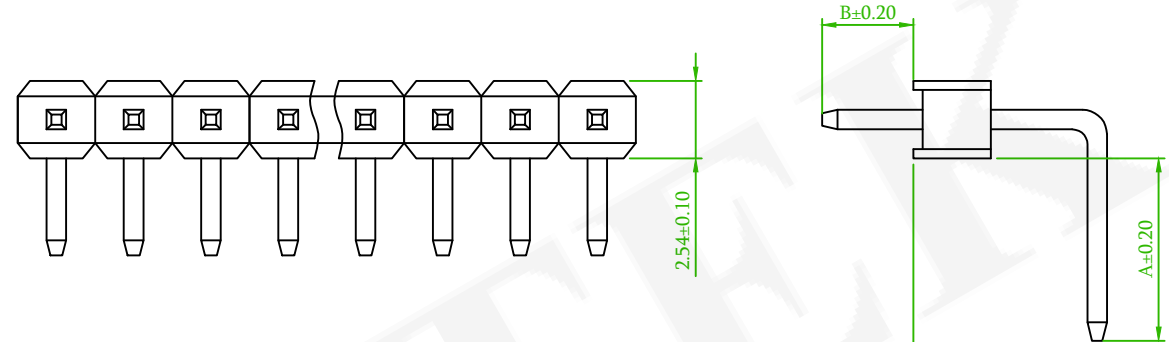

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No. :PH1RU25-1XX-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
 x2	ECN NO.:210916 Revise the drawing	Alice	2021/10/20
	Modify order information	B	2017/01/25 Gary

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 2.54mm PLASTIC HEIGHT 2.5mm U TYPE				頁數 Page	1/1
	品號 PART NO.	5PH1RUA25-1XXXXNXXU -XXXXXXXXXX-00				繪圖 DRAWN	Mia 2015/08/24
	圖號 DRAWING NO.	GN016-GA159	版本 REV.	C	核對 CHECKED	John 2015/08/24	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/24	
	公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	