

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION

5 P H 1 S D A 1 5 - 1 X X X X N N X U - A B 000 - 0 0

1:Single Row

No. of contacts
Per Row(02~40)

G0:Gold Flash
GA: Au 5u"
GB: Au 10u"
GC: Au 20u"
GD: Au 30u"
T0: Tin Plated

S0: Selective Au
SA: Selective Au 5u"
SB: Selective Au 10u"
SC: Selective Au 20u"
SD: Selective Au 30u"
TE: Tin 200u"

N: Non Type

N: W/O Peg

X: Box

C: Tube With Cap


B: Bag

U: RoHS+Hi-Temp.



EX: 060030000
A: 6.0
B: 3.0



CAP	L	W	H (Ref.)
> 1 x 4 Pin	10.0	5.0	7.0
≤ 1 x 4 Pin	5.0	4.0	2.6

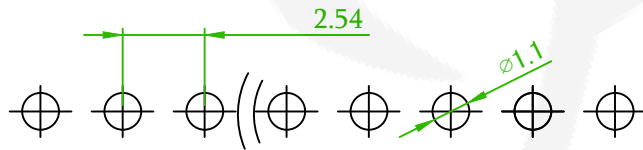

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

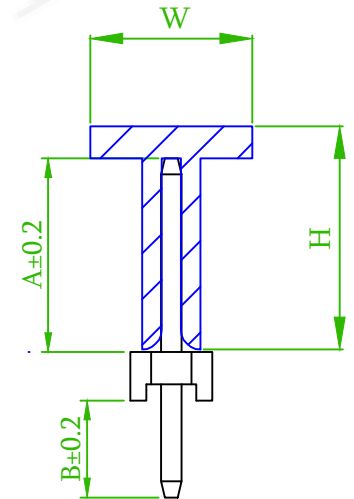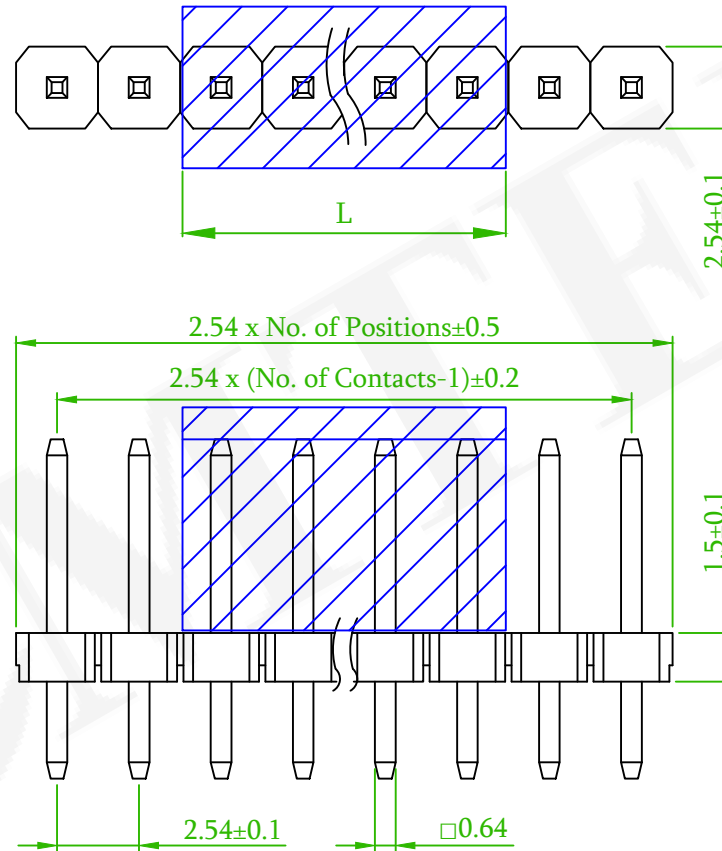

Old Part No.: PH1S15-1XX-U

	ECN NO.:211018 Revise the drawing	Alice	2021/11/17
	ECN No.:171201, Revise the Cap.	Andy	2017/12/01
	Modify order information	Gary	2017/01/25
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.54mm				頁數 Page	1/1
品號 PART NO.	5PH1SDA15-1XXXXNNXU -XXXXXX000-00				繪圖 DRAWN	Mia 2015/08/24
圖號 DRAWING NO.	GN016-GA163	版本 REV.	D	核對 CHECKED	John 2015/08/24	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/24	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		