

MATERIAL 
Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION

5 P H 1 S D A 1 5 - 2 X X X X N N X U - A B 000 - 0 0

2: Dual Row

No. of contacts Per Row(02~40)

G0: Gold Flash	S0: Selective Au
GA: Au 5u"	SA: Selective Au 5u"
GB: Au 10u"	SB: Selective Au 10u"
GC: Au 20u"	SC: Selective Au 20u"
GD: Au 30u"	SD: Selective Au 30u"
T0: Tin Plated	TE: Tin 200u"

N: Non Type

N: W/O Peg


X: Box
B: Bag

U: RoHS+Hi-Temp.


EX: 060030000
A: 6.0
B: 3.0



AMTEK 耀德
2022.01.05
Released DCC

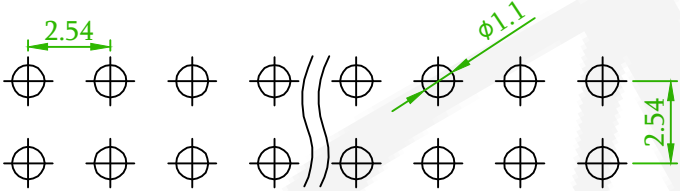

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

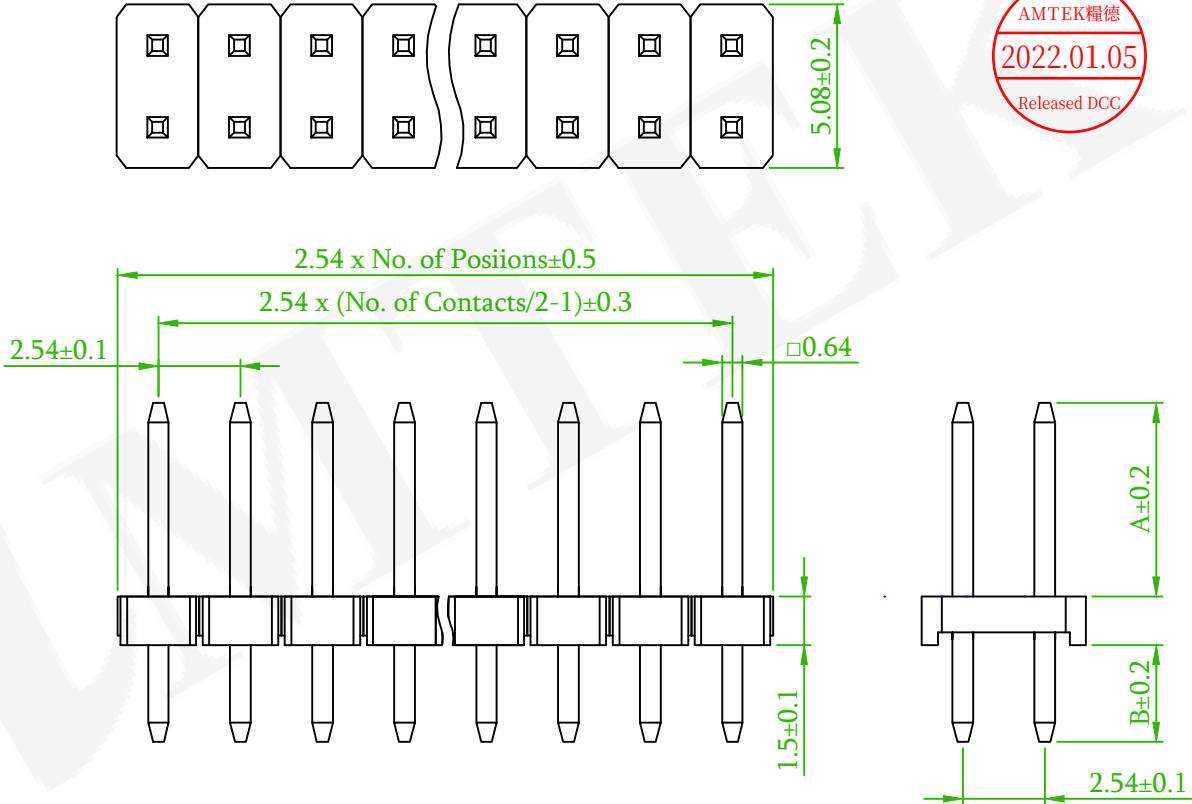

Old Part No. :PH1S15-2XX-U

	ECN NO.:211018 Revise the drawing	Alice	2021/11/17
	ECN No.:180310,Remove the Cap & Revise the Package option .	Roy	2018/03/22
	ECN No.:171201, Revise the Cap.	Andy	2017/12/01
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 2.54mm D/R V/T DIP TYPE				頁數 Page	1/1
	品號 PART NO.	5PH1SDA15-2XXXXNNXU -XXXXXX000-00				繪圖 DRAWN	Joey 2016/08/25
	圖號 DRAWING NO.	GN016-GA165	版本 REV.	E	核對 CHECKED	Josh 2018/03/22	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/03/22	
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		