



MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass



ORDER INFORMATION

5 P H 1 S D A 1 7 - 2 X X X X N N X U - A B 000 - 0 0

2: Dual Row	No. of contacts Per Row(02~40)	G0: Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0: Tin Plated	S0: Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u" TE: Tin 200u"	N: Non Type N: W/O Peg	U: RoHS+Hi-Temp. X: Box B: Bag	EX: 060030000 A: 6.0 B: 3.0
-------------	-----------------------------------	---	--	---------------------------	--------------------------------------	-----------------------------------

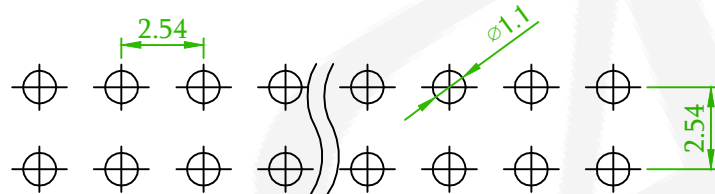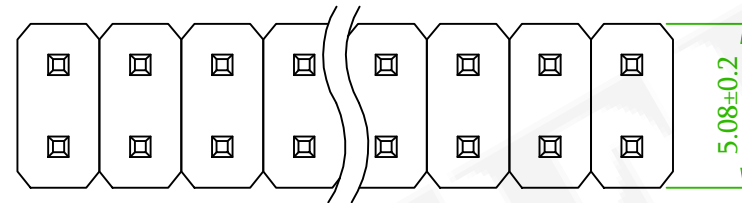

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

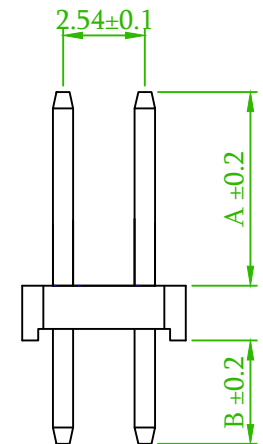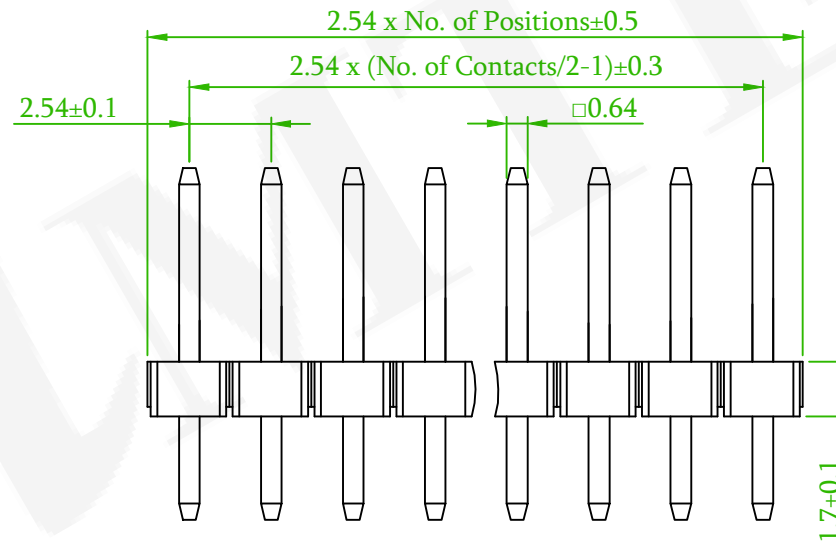

Old Part No.: PH1S17-2XX-U

	ECN NO.:211018 Revise the drawing	Alice	2021/11/22
	ECN No.:180310, Remove the Cap & Revise the Package option .	Roy	2018/03/22
	ECN No.:171201, Revise the Cap.	Andy	2017/12/01
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.54mm D/R V/T DIP TYPE				頁數 Page	1/1
品號 PART NO.	5PH1SDA17-2XXXXNNXU -XXXXXX000-00				繪圖 DRAWN	Joey 2016/08/25
圖號 DRAWING NO.	GN016-GA169	版本 REV.	E	核對 CHECKED	Josh 2018/03/22	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/03/22	
公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	