

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black △
Contact Pin: Brass △

ORDER INFORMATION

5	P	H	1	S	D	A	2	5	-	1	X	X	X	X	N	N	X	U	-	A	B	000	-	0	0
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	-----	---	---	---

1:Single Row

No. of contacts Per Row(02~40)

G0:Gold Flash	S0:Selective Au
GA: Au 5u"	SA: Selective Au 5u"
GB: Au 10u"	SB: Selective Au 10u"
GC: Au 20u"	SC: Selective Au 20u"
GD: Au 30u"	SD: Selective Au 30u"
T0: Tin Plated	TE: Tin 200u"
TM: Matte Tin	

N: Non Type

N:W/O Peg

U: RoHS+Hi-Temp.

X: Box

B: Bag

R: T/R With Cap

EX: 060030000

A: 6.0


B: 3.0



CAP	L	W	H (Ref.)
> 1 x 4 Pin	10.0	5.0	7.0
≤ 1 x 4 Pin	5.0	4.0	2.6



Recommended PCB Layout
(PCB TOLERANCE ±0.1)

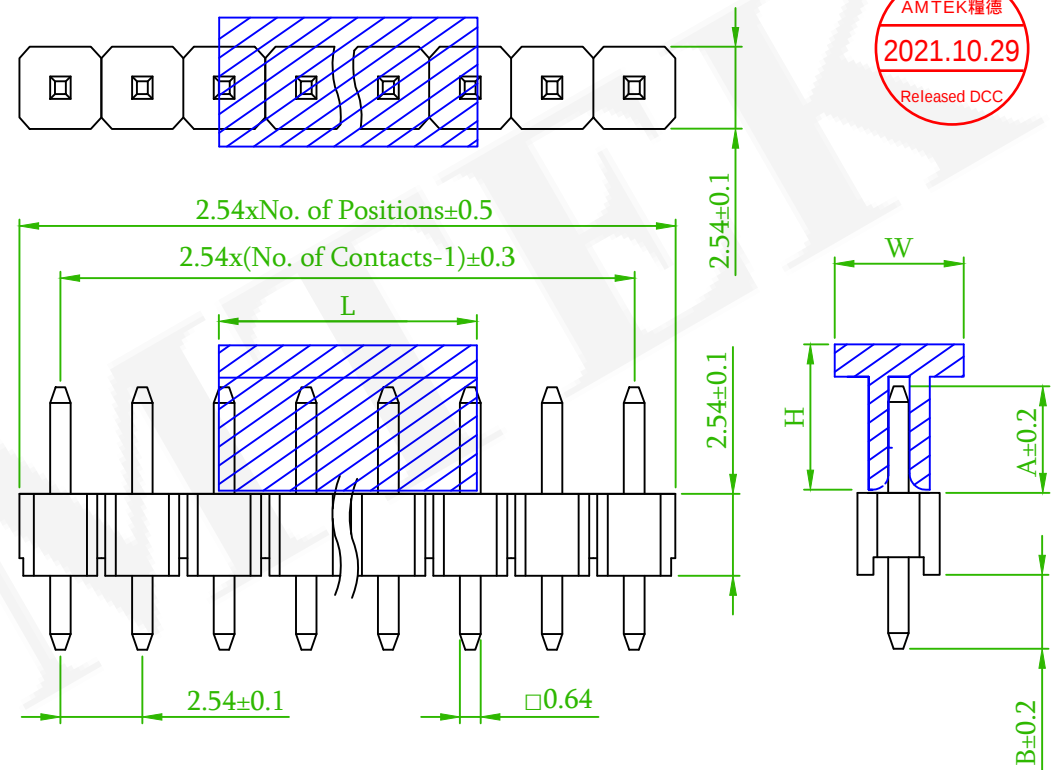

Old Part No. :PH1S25-1XX-U

△ x2	ECN NO.:210916 Revise the drawing	Alice	2021/10/6
△	ECN No.:180310,Remove the Cap & Revise the Package option .	Roy	2018/03/22
△	ECN No.:171201, Revise the Cap.	Andy	2017/12/01
△	Modify order information	Gary	2017/01/26
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 2.54mm S/R V/T DIP TYPE				頁數 Page	1/1
	品號 PART NO.	5PH1SDA25-1XXXXNNXU -XXXXXX000-00				繪圖 DRAWN	Mia 2015/08/24
	圖號 DRAWING NO.	GN016-GA174	版本 REV.	F	核對 CHECKED	Josh 2018/03/22	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/03/22	
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		