

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black 

Contacts Pin: Brass 

ORDER INFORMATION

5 P H 1 S D A 2 5 - 2 X X X X X   X X X U - A B 000 - 0 0 



2: Dual Row	No. of contacts Per Row(02~40)	G0: Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0: Tin Plated	S0: Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u" TE: Tin 200u"	N: Non Type N: W/O Peg	U: RoHS +Hi-Temp.	EX: 060030000 A: 6.0 B: 3.0
					X: Box B: Bag H: T/R W/O Cap R: T/R With Cap	



NOTE 1


Package For Tape & Reel With CAP & W/O CAP:

5PH1SDA25-2XXXXXNNXU-XXX XXX XXX-00




R: T/R With Cap
H: T/R W/O Cap



Total Height must be
less than 23mm.



CAP	L	W	H (Ref.)
> 2 x 4 Pin	10.0	6.3	7.0
≤ 2 x 4 Pin	5.08	6.3	7.0

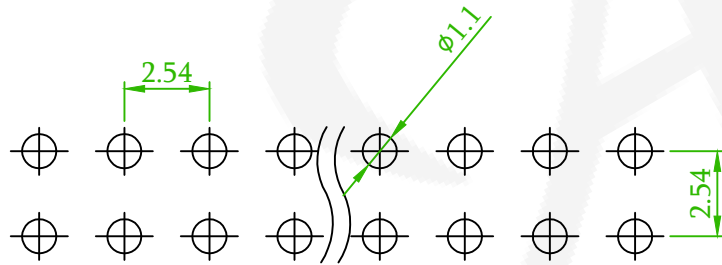


Recommended PCB Layout
(PCB TOLERANCE ±0.1)

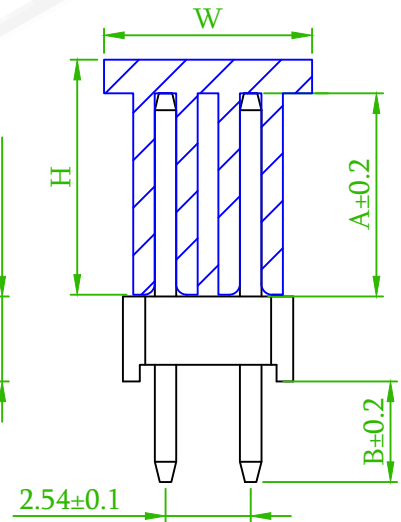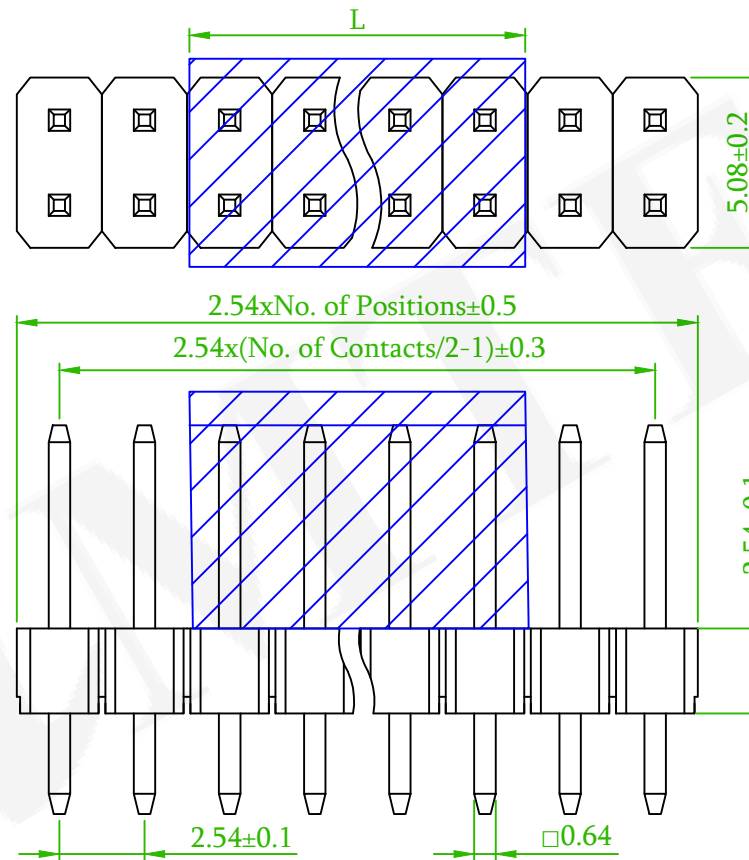

Released DCC

Old Part No. : PH1S25-2XX-U



品名 TITLE	PIN HEADER 2.54mm D/R V/T DIP TYPE				頁數 Page	1/1
品號 PART NO.	 5PH1SDA25-2XXXXXXXU -XXXXXX000-00				繪圖 DRAWN	Mia 2015/08/24
圖號 DRAWING NO.	GN016-GA176	版本 REV.	I	核對 CHECKED	Josh 2018/03/22	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/03/22	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

 x4	Revise the Drawing	Rex	2023/03/13
 x2	Add the package option & NOTE 1	Benson	2022/10/19
 x2	ECN NO.: 210916 Revise the drawing	Alice	2021/10/6
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE