
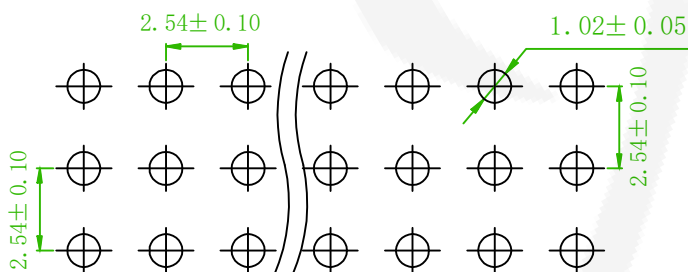
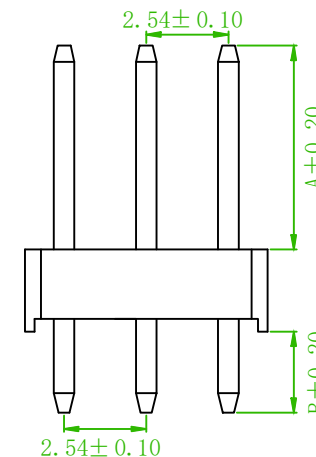
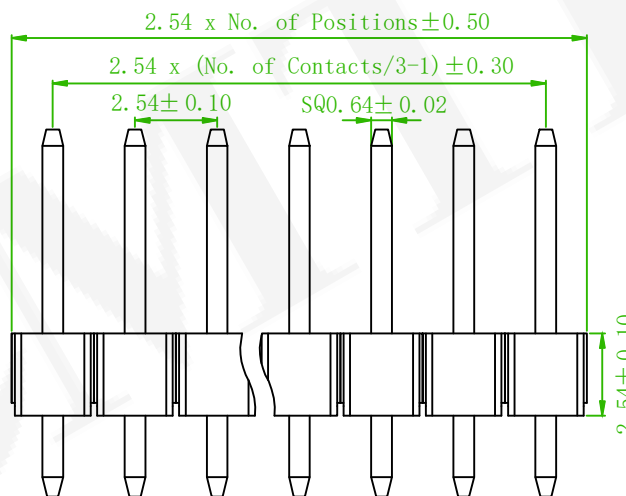


MATERIAL

Insulator: Nylon 9T, UL94V-0
Contact Pin: Brass

ORDER INFORMATION

5	P	H	1	S	D	A	2	5	-	3	X	X	X	X	N	N	X	U	-	A	B	000	-	0	0
3:Triple Row				No. of contacts Per Row(02~40)				G0:Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0: Tin Plated				S0:Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u" TE: Tin 200u"				N:Non Type N:W/O Peg		X:Box C:Tube With Cap		B:Bag B:3.0		EX:060030000 A:6.0 B:3.0			

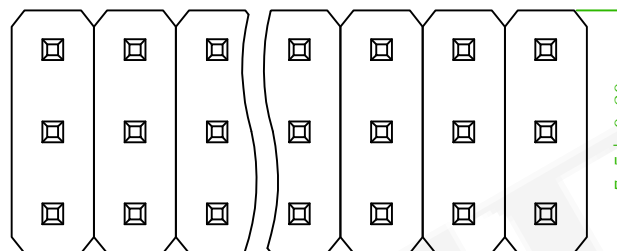

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No.: PH1S-3XX-U

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 2.54mm PLASTIC HEIGHT 2.5mm DIP STRAIGHT				頁數 Page	1/1
	品號 PART NO.	5PH1SDA25-3XXXXNNXU -XXXXXX000-00				繪圖 DRAWN	Mia 2015/08/24
	圖號 DRAWING NO.	GN016-GA178	版本 REV.	C	核對 CHECKED	John 2015/08/24	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/24	
	公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△x2	ECN NO.:210916 Revise the drawing	Alice	2021/11/03
△	Modify order information	B	2017/01/26 Gary