

MATERIAL ⚠

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION

5 P H 1 S D A 4 3 - 2 X X X X

2: Dual Row

No. of contacts
Per Row(01~40)

G0: Gold Flash

GA: Au 5u"

GB: Au 10u"

GC: Au 20u"

GD: Au 30u"

T0: Tin Plated

S0: Selective Au

SA: Selective Au 5u"

SB: Selective Au 10u"

SC: Selective Au 20u"

SD: Selective Au 30u"

TE: Tin 200u"

N

N

X

U

-

A

B

000

-

0

0

N: Non Type

N: W/O Peg

U: RoHS
+Hi-Temp.

X: Box

B: Bag


EX: 060030000
A: 6.0
B: 3.0






AMTEK 耀德

2022.01.05

Released DCC

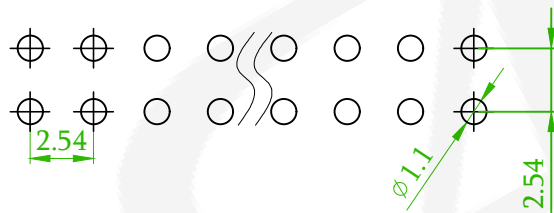

Recommended PCB Layout
(PCB TOLERANCE ± 0.1)

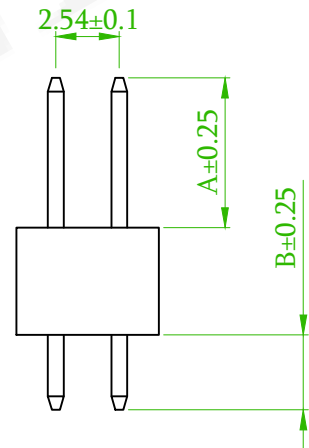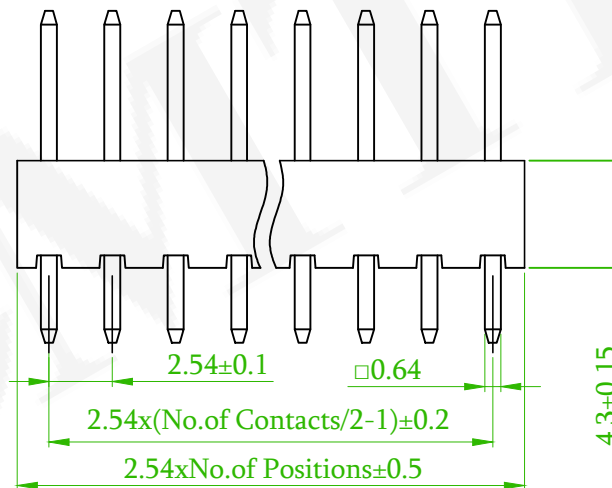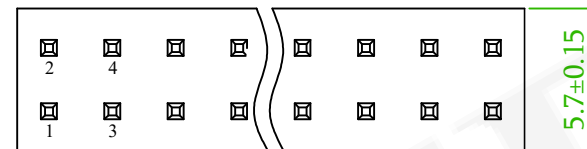

Old Part No. : PH1SDA43-2XX-U

⚠	ECN NO.:211018 Revise the drawing	Alice	2021/11/23
⚠	ECN No.:180310, Remove the Cap & Revise the Package option .	Roy	2018/03/22
⚠	ECN No.:171201, Revise the Cap.	Andy	2017/12/01
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.54mm D/R V/T DIP TYPE				頁數 Page	1/1
品號 PART NO.	5PH1SDA43-2XXXXNXXU -XXXXXX000-00				繪圖 DRAWN	Jeff 2016/09/19
圖號 DRAWING NO.	GN003-GA198	版本 REV.	E	核對 CHECKED	Josh 2018/03/22	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/03/22	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		