

MATERIAL

Insulator: P.B.T, UL 94V-0
Contact Pin: Brass

ORDER INFORMATION

5PH1SDA74-2XXNXL-AB000-00

2: Dual Row

No. of contacts
Per Row(02~40)

G0: Gold Flash

GA: Au 5u"

GB: Au 10u"

GC: Au 20u"

GD: Au 30u"

T0: Tin Plated

S0: Selective Au

SA: Selective Au 5u"

SB: Selective Au 10u"

SC: Selective Au 20u"

SD: Selective Au 30u"

TE: Tin 200u"

N: Non Type

N: W/O Peg

X: Box

C: Tube With Cap


B: Bag

L: RoHS+P.B.T




EX: 060030000

A: 6.0

B: 3.0

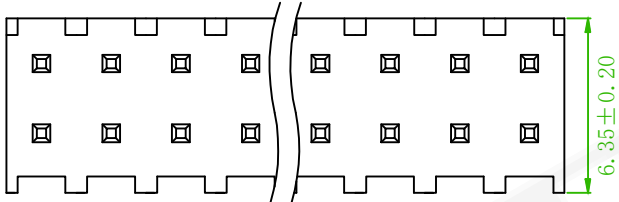

AMTEK 耀德
2022.01.05
Released DCC

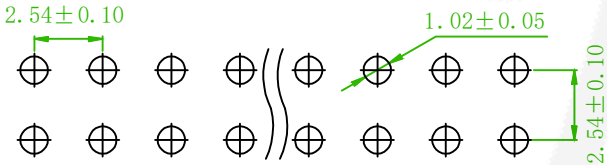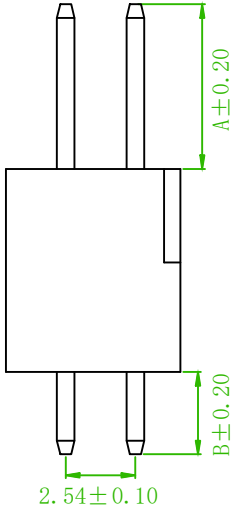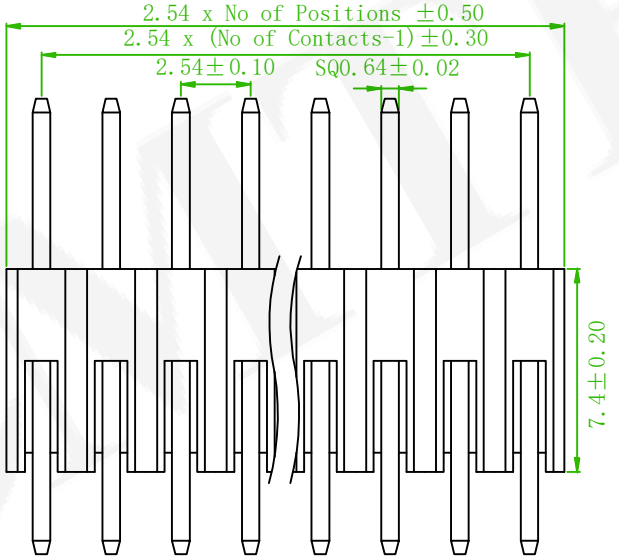

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No. :PH1S74-2XX-L

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 2.54mm PLASTIC HEIGHT 7.4mm DIP STRAIGHT				頁數 Page	1/1
	品號 PART NO.	5PH1SDA74-2XXXXNXL -XXXXXX000-00				繪圖 DRAWN	Mia 2015/08/24
	圖號 DRAWING NO.	GN016-GA182	版本 REV.	C	核對 CHECKED	John 2015/08/24	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/24	
	公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	.X° ± 3	單位 UNIT	mm	THIRD ANGLE PROJECTION	

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△x1	ECN NO.:211018 Revise the drawing	Alice	2021/11/23
△	Modify order information	B	2017/01/26 Gary