

MATERIAL ⚠

Insulator: Nylon 9T, UL 94V-0 Black
Contact Pin: Brass

ORDER INFORMATION

5 P H 1 U D A 2 5 - 1 0 3 X X N N X U - A B 000 - 0 0

1:Single Row

No. of contacts
Per Row

G0:Gold Flash

GA: Au 5u"

GB: Au 10u"

GC: Au 20u"

GD: Au 30u"

T0: Tin Plated

S0: Selective Au

SA: Selective Au 5u"

SB: Selective Au 10u"

SC: Selective Au 20u"

SD: Selective Au 30u"

TE: Tin 200u"

N: Non Type

N: W/O Peg

U: RoHS
+Hi-Temp.

X: Box


B: Bag

C: Tube With Cap



EX: 060030000

A: 6.0

B: 3.0

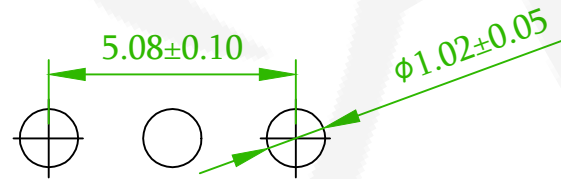

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

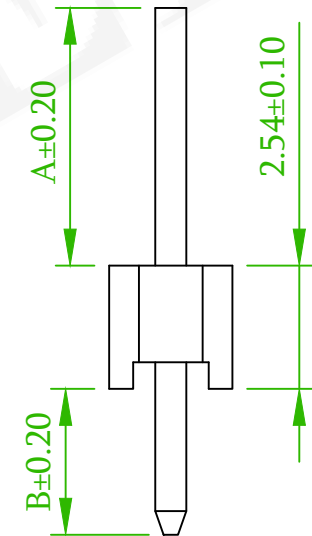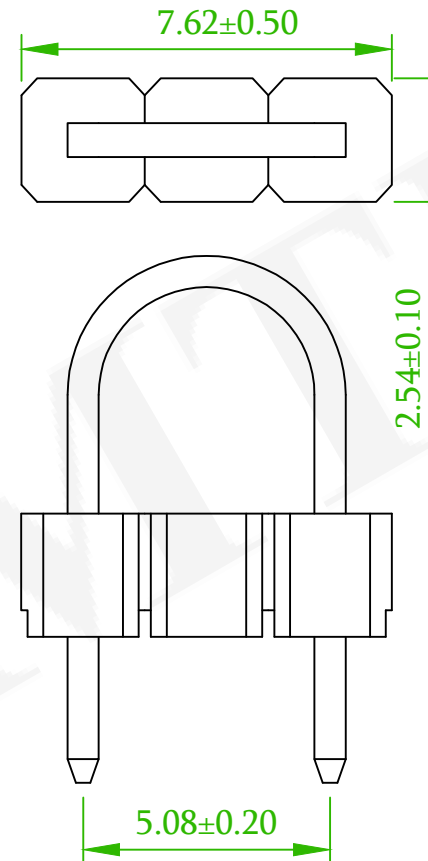

AMTEK 耀德
2022.01.05
Released DCC

Old Part No. : PH1U25-103-U

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 2.54mm STRAIGHT U TYPE PLASTIC HEIGHT 2.5mm				頁數 Page	1/1
	品號 PART NO.	5PH1UDA25-103XXNNU -XXXXXX000-00				繪圖 DRAWN	Jeff 2016/09/19
	圖號 DRAWING NO.	GN016-GA185	版本 REV.	C	核對 CHECKED	Johnny 2016/09/19	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/09/19	
	公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△x1	ECN NO.:211018 Revise the drawing	Alice	2021/11/23
△	Modify order information	B	2017/01/26 Gary