

MATERIAL

Insulator: Nylon 9T, UL 94V-0 Black
Contact Pin: Brass

ORDER INFORMATION

5 P H 1 U R A 2 5 - 1 0 3 X X

1:Single Row

No. of contacts
Per Row

G0:Gold Flash

GA: Au 5u"

GB: Au 10u"

GC: Au 20u"

GD: Au 30u"

T0: Tin Plated

S0: Selective Au

SA: Selective Au 5u"

SB: Selective Au 10u"

SC: Selective Au 20u"

SD: Selective Au 30u"

TE: Tin 200u"

N N X U - A B 000 - 0 0

N: Non Type

N: W/O Peg

U : RoHS
+Hi-Temp.

X: Box

B: Bag

C: Tube With Cap

EX: 053036000

A: 5.3


B: 3.6



AMTEK 糧德

2022.01.05

Released DCC

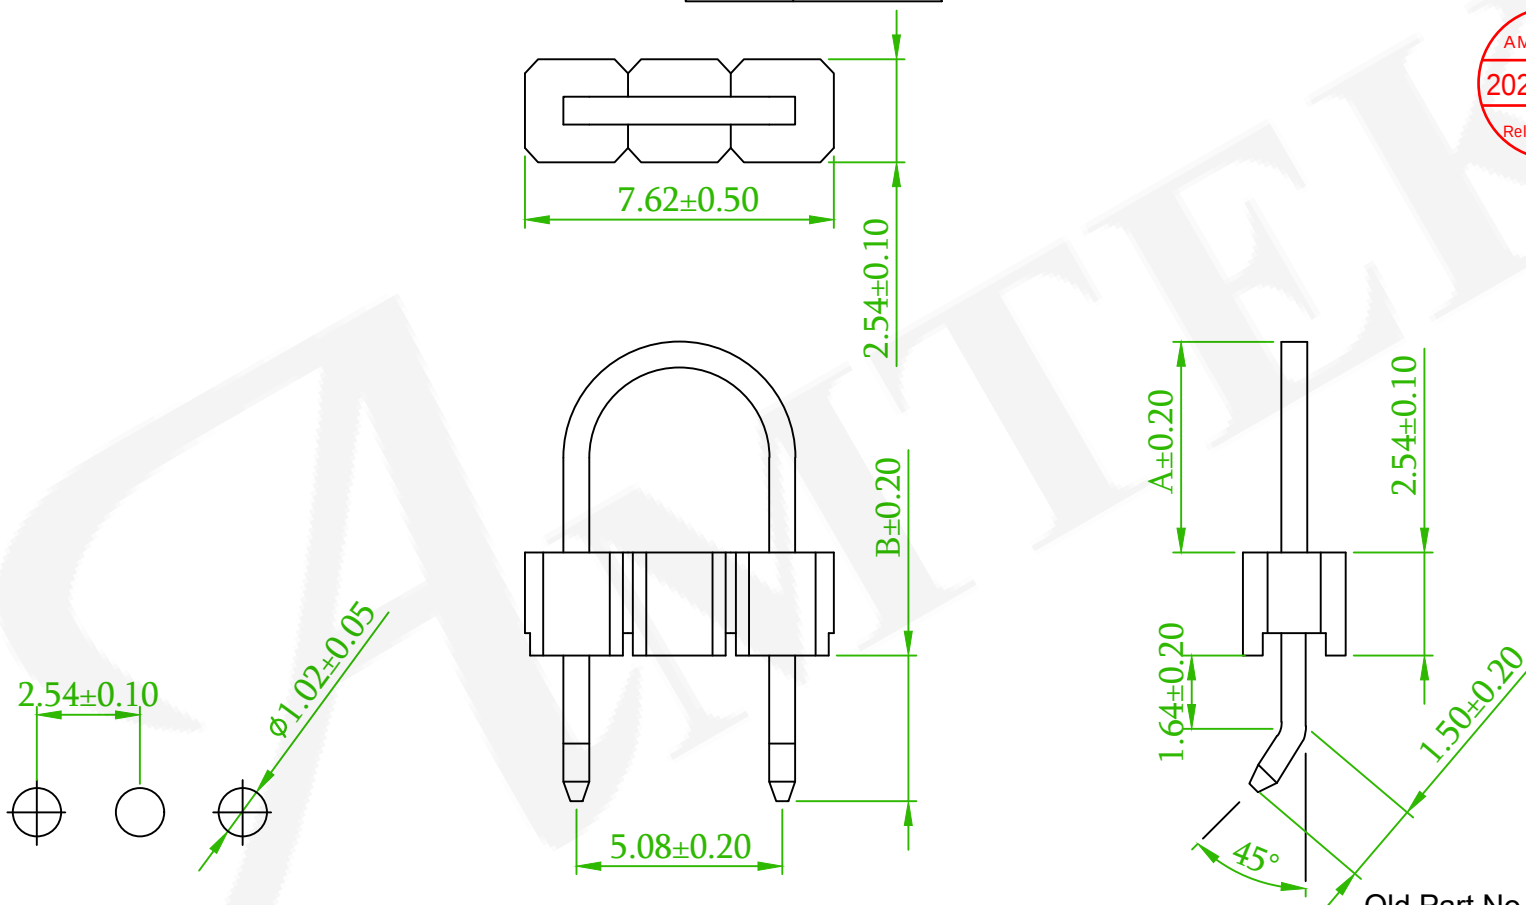

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

Old Part No. : PH1UR25-103-U



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.54mm PLASTIC HEIGHT 2.5mm U R/A TYPE				頁數 Page	1/1
品號 PART NO.	5PH1URA25-103XXNNXU -XXXXXX000-00				繪圖 DRAWN	Jeff 2016/09/19
圖號 DRAWING NO.	GN016-GA315	版本 REV.	C	核對 CHECKED	Johnny 2016/09/19	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/09/19	
公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
	ECN NO.:211018 Revise the drawing	Alice	2021/11/23
	Modify order information	B	2017/02/10 Gary