

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black 
Contact Pin: Brass 

ORDER INFORMATION

5 P H 2 D D A 1 5 - 2 X X X X N N X U - A L 1 B - 0 0


2: Dual Row	No. of contacts Per Row(02~40)	G0: Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0: Tin Plated	S0: Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u" TE: Tin 200u"	N: W/O Peg	X: Box B: Bag R: T/R with Cap	RoHS	EX: 040XXX028 A: 4.0 L1: As Required B: 2.8
-------------	-----------------------------------	---	--	------------	-------------------------------------	------	--



NOTE 1


Package For Tape & Reel With CAP:

5PH2DDA15-2XXXXNNR U-XXX XXX XXX-00


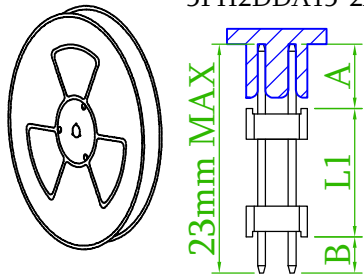


DIM.A
DIM. L1
DIM.B
R: T/R With Cap

DIM.A add DIM.L1 add DIM.B must be less than 23mm.

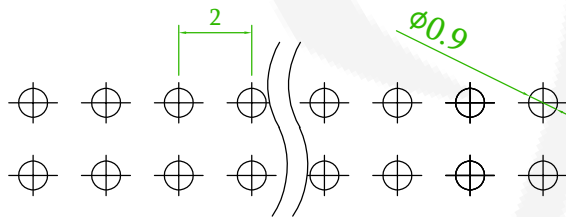

Recommended PCB Layout
(PCB TOLERANCE ± 0.1)

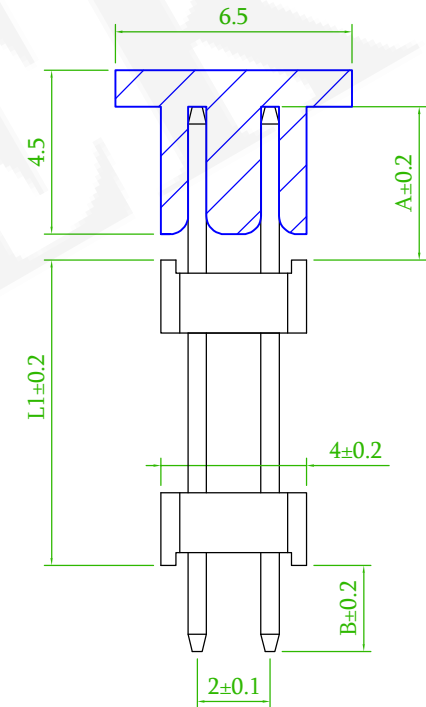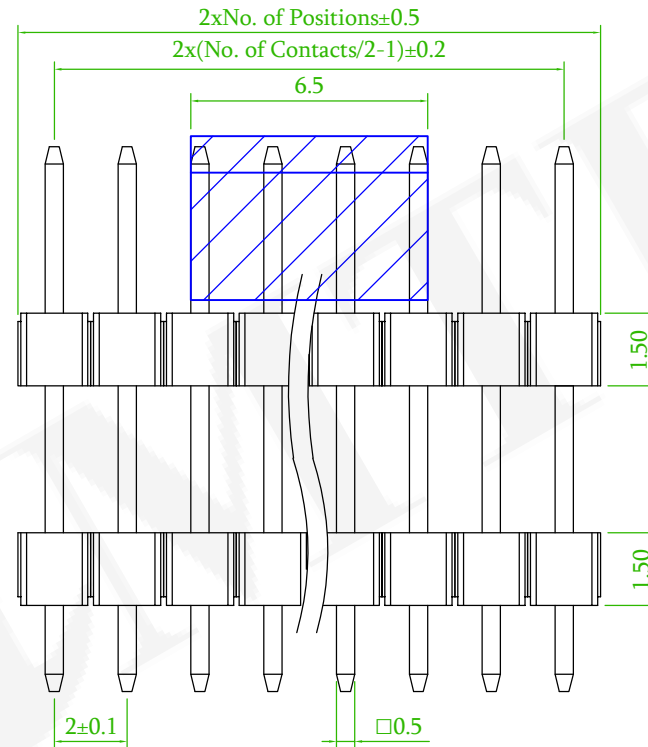

Old Part No. : PH2D15-2XX-U

 x2	Add the Package options	Benson	2021/10/25
 x2	ECN NO.:210916 Revise the drawing	Alice	2021/10/6
 x1	ECN No.:210619 Cancel the top view	Alice	2021/09/15
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.0mm D/R V/T DIP TYPE				頁數 Page	1/1
品號 PART NO.	5PH2DDA15-2XXXXNNXU -XXXXXXXXXX-00				繪圖 DRAWN	Athena 2015/08/14
圖號 DRAWING NO.	GN016-GA214	版本 REV.	G	核對 CHECKED	John 2015/08/14	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/14	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		