



MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass


ORDER INFORMATION

5 P H 2 D D A 2 0 - 2 X X X X N N X U - A L 1 B - 0 0



2: Dual Row	No. of contacts Per Row(02~40)	G0: Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0: Tin Plated	S0: Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u" TE: Tin 200u"	N: W/O Peg	X: Box B: Bag T: Tube W/O Cap	RoHS	EX: 040XXX028 A: 4.0 L1: As Required B: 2.8
-------------	-----------------------------------	---	--	------------	-------------------------------------	------	--



AMTEK 耀德
2022.10.11
Released DCC

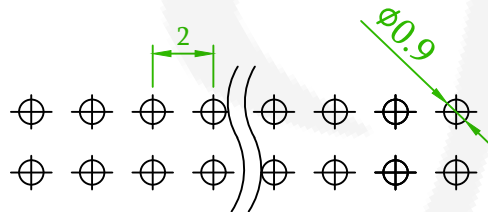

Recommended PCB Layout
(PCB TOLERANCE ± 0.1)

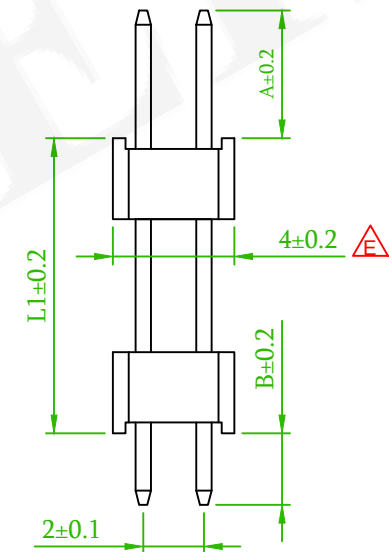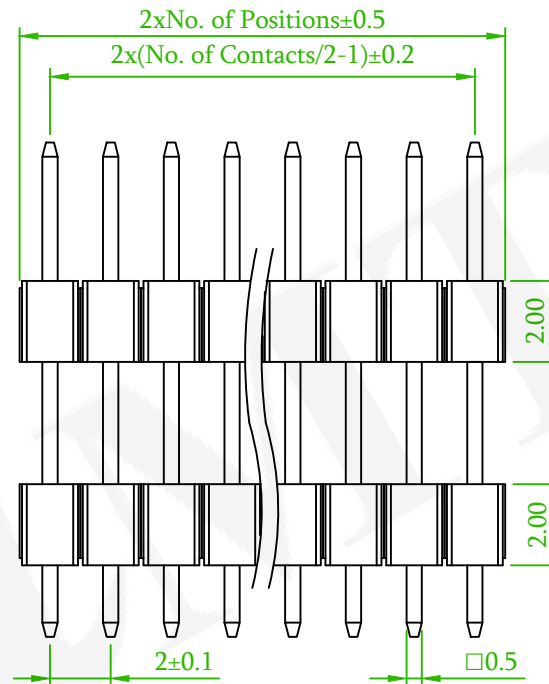

Old Part No. : PH2D20-2XX-U

F X2	Remove the Specifications & Revise the Package option .	Tim	2022/10/11
E X1	ECN 210104: Revise the drawing	Alice	2021/01/22
A	ECN No.:180310, Remove the Cap & Revise the Package option .	Roy	2018/03/22
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.0mm D/R V/T DIP TYPE				頁數 Page	1/1
品號 PART NO.	5PH2DDA20-2XXXXXXNXU -XXXXXXXXXX-00				繪圖 DRAWN	Athena 2015/08/14
圖號 DRAWING NO.	GN016-GA218	版本 REV.	F	核對 CHECKED	Josh 2018/03/22	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/03/22	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		