

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black 
Contact Pin: Brass 

ORDER INFORMATION

5 P H 2 D M A 1 5 - 2 X X X X X N X U - A L 1 B - 0 0

2: Dual Row

No. of contacts
Per Row(02~50)

G0: Gold Flash

GA: Au 5u"

GB: Au 10u"

GC: Au 20u"

GD: Au 30u"

T0: Tin Plated

S0: Selective Au

SA: Selective Au 5u"

SB: Selective Au 10u"

SC: Selective Au 20u"

SD: Selective Au 30u"

TE: Tin 200u"

N: W/O Peg

P: With Peg

R: T/R With Cap

H: T/R W/O Cap

C: Tube With Cap

T: Tube W/O Cap

RoHS

EX: 060XXX050

A: 6.0

L1: As Required


B: 5.0







AMTEK 耀德
2021.10.29
Released DCC

CAP	L	W	H (Ref.)
≥ 2 x 2 Pin	6.5	6.5	4.5

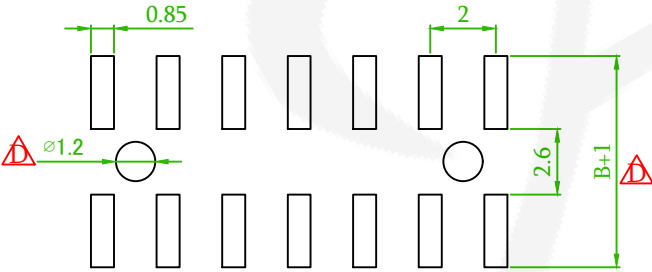

Recommended PCB Layout
(PCB TOLERANCE: ±0.1) 

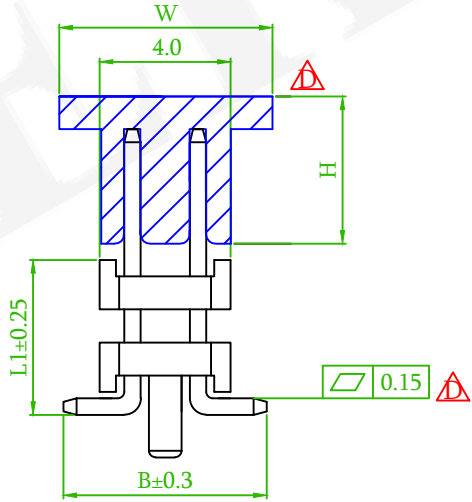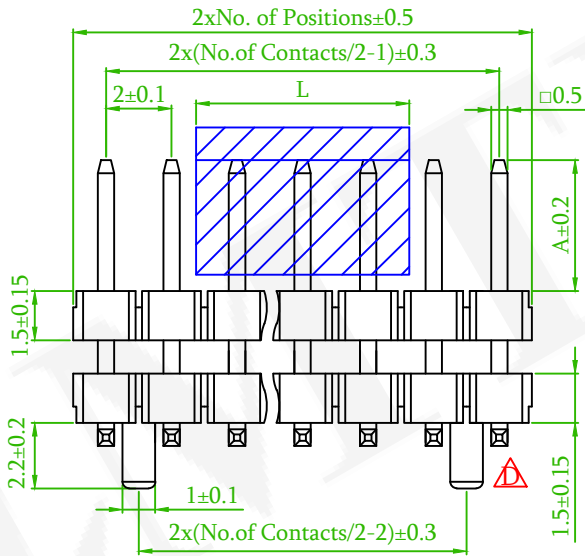

Old Part No. : PH2DM15-2XX-U

 x2	ECN NO.:210916 Revise the drawing	Alice	2021/10/6
	ECN No.:210619 Cancel the top view	Alice	2021/09/17
	ECN No.:171201, Revise the Cap.	Roy	2017/12/01
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.0mm				頁數 Page	1/1
品號 PART NO.	5PH2DMA15-2XXXXXXNXU -XXXXXXXXXX-00				繪圖 DRAWN	Athena 2015/08/14
圖號 DRAWING NO.	GN016-GA220	版本 REV.	G	核對 CHECKED	John 2015/08/14	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/14	
公差 TOLERANCE	.X ±0.38 .XX ±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		