

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION

5 P H 2 D M A 2 0 - 1 X X X X

N X X U - A L 1 B - 0 0

1:Single Row

No. of contacts Per Row(02~40)

G0:Gold Flash	S0:Selective Au
GA:Au 5u"	SA:Selective Au 5u"
GB:Au 10u"	SB:Selective Au 10u"
GC:Au 20u"	SC:Selective Au 20u"
GD:Au 30u"	SD:Selective Au 30u"
T0:Tin Plated	TE:Tin 200u"

N:W/O Peg

A:A Type (Odd & Even Pin)
B:B Type (Only Even Pin)

U:RoHS +Hi-Temp.


EX:060XXX050
A:6.0
L1:As Required
B:5.0

R:T/R With Cap
H:T/R W/O Cap
C:Tube With Cap (5 Pin ↑)
T:Tube W/O Cap (5 Pin ↑)




AMTEK 糧德
2023.05.11
Released DCC

CAP	L	W	H (Ref.)
≧ 1 x 2 Pin	5.0	5.08	4.5

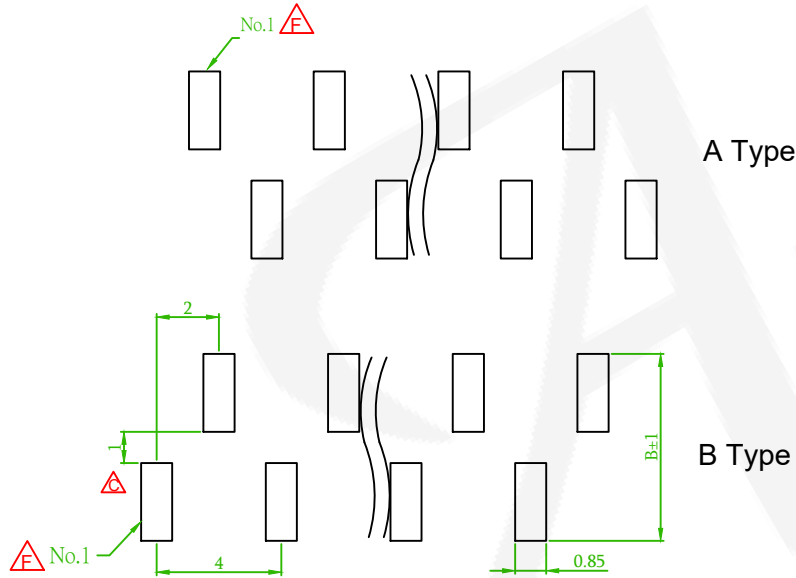

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

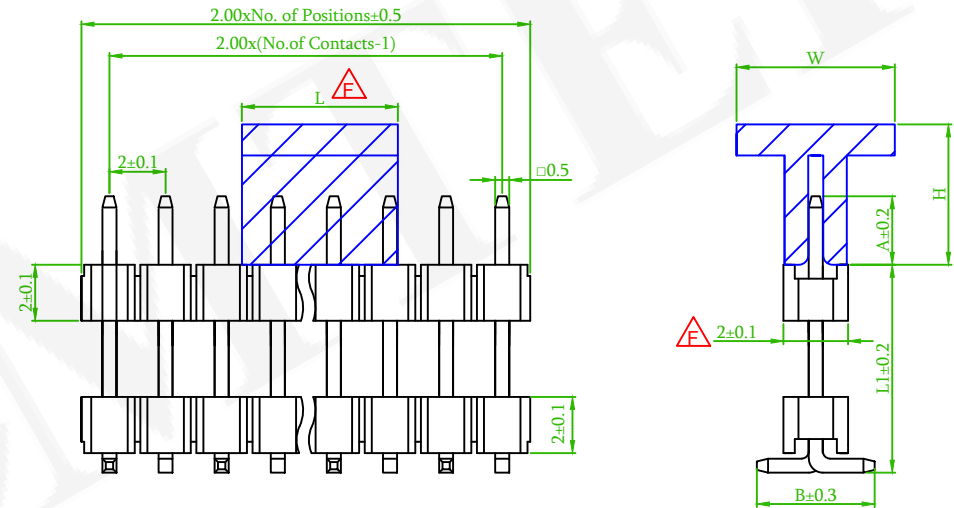

Old Part No. : PH2DM20-1XX-U

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 2.0mm			頁數 Page	1/1
	品號 PART NO.	5PH2DMA20-1XXXXNXXU -XXXXXXXXXX-00			繪圖 DRAWN	Jeff 2016/09/14
	圖號 DRAWING NO.	GN016-GA259	版本 REV.	G	核對 CHECKED	Johnny 2016/09/14
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/09/14
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION	

	ECN NO.:221005 Revise the drawing	Tim	2022/11/10
	ECN 210104: Revise the drawing	Alice	2021/01/22
	ECN No.:171201, Revise the Cap.	Roy	2017/12/01
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE