

MATERIAL

Insulator: Nylon 9T, UL 94V-0
Contact Pin: Brass

ORDER INFORMATION

5 P H 2 D R A 1 5 - 1 X X X X N N X U - A L 1 B - 0 0

1:Single Row

No. of contacts
Per Row(02~40)

G0:Gold Flash

GA:Au 5u"

GB:Au 10u"

GC:Au 20u"

GD:Au 30u"

T0:Tin Plated

S0:Selective Au

SA:Selective Au 5u"

SB:Selective Au 10u"

SC:Selective Au 20u"

SD:Selective Au 30u"

TE:Tin 200u"

N:Non Type

N:W/O Peg

X:Box

C:Tube With Cap

U:RoHS
+Hi-Temp.



B:Bag

EX:040XXX035
A:4.0
L1:As Required
B:3.5

AMTEK 耀德

2023.05.11

Released DCC

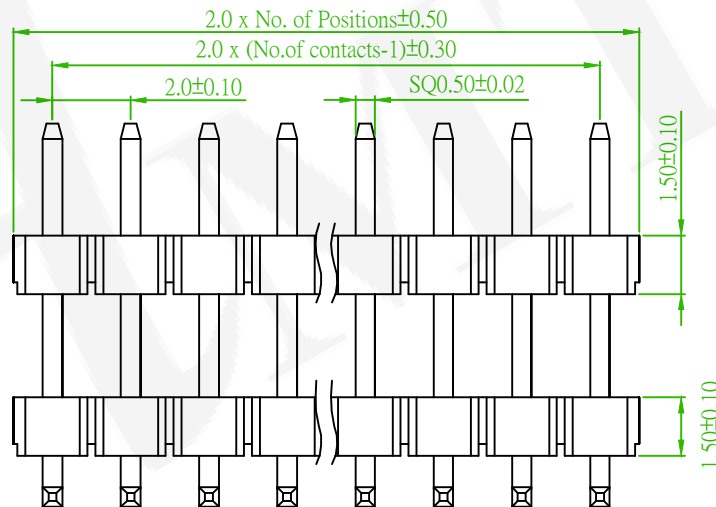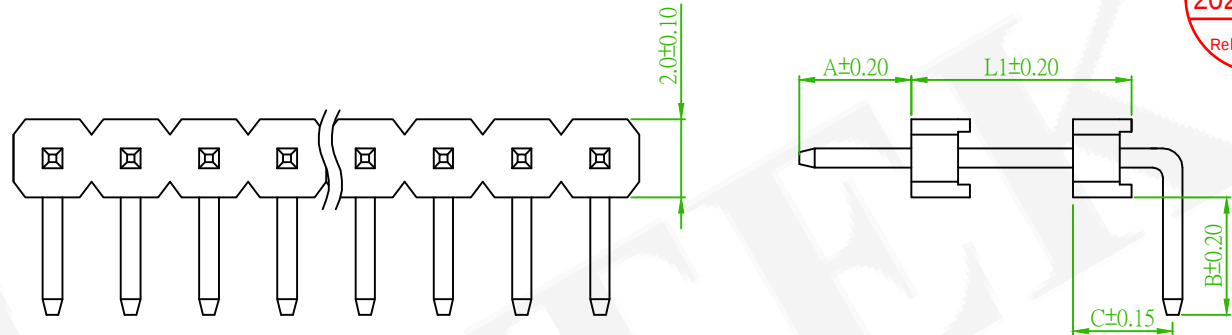

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No. : PH2RDD15-1XX-U

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 2.0mm R/A TYPE PLASTIC HEIGHT 1.5mm				頁數 Page	1/1
	品號 PART NO.	5PH2DRA15-1XXXXNNXU -XXXXXXXXXX-00				繪圖 DRAWN	Jeff 2016/09/14
	圖號 DRAWING NO.	GN016-GA223	版本 REV.	C	核對 CHECKED	Johnny 2016/09/14	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/09/14	
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

 X1	ECN NO.:221005 Revise the drawing	Tim	2022/11/10
	Modify order information	B	2017/02/02 Gary
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE