

MATERIAL ▲

Insulator: Nylon 9T, UL 94V-0,Black
Contact Pin: Brass





ORDER INFORMATION

5PH2DRA15-4XXXNXXN-ALB-00

4:Quad Row	No. of contacts Per Row(01~50)	G0:Gold Flash	S0:Selective Au	N:Non Type	U:RoHS +Hi-Temp.	EX:040XXX028 A:4.0 L1:As Required B:2.8
		GA:Au 5u"	SA:Selective Au 5u"			
		GB:Au 10u"	SB:Selective Au 10u"			
		GC:Au 20u"	SC:Selective Au 20u"			
		GD:Au 30u"	SD:Selective Au 30u"			
		T0:Tin Plated	TE:Tin 200u"	N:W/O Peg	X:Box B:Bag	



AMTEK 耀德
2023.05.11
Released DCC

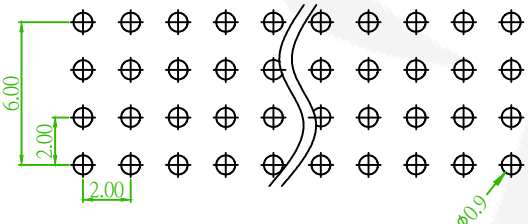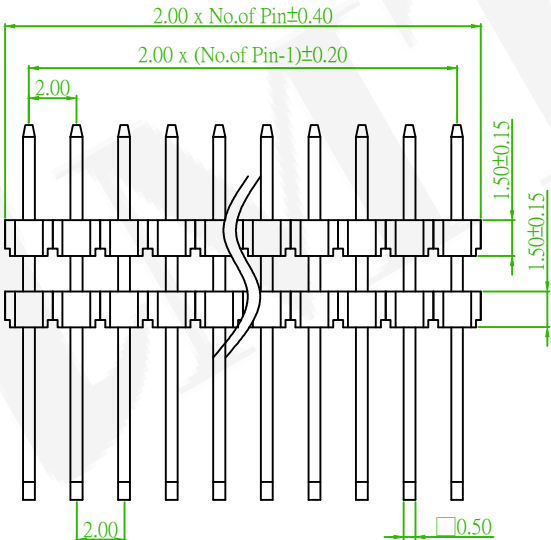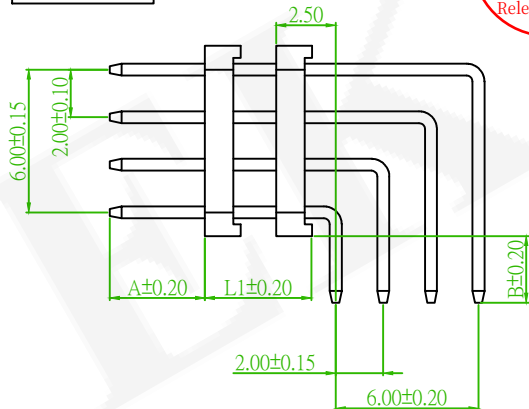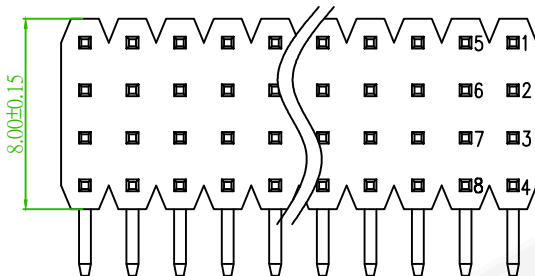

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.1)

耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.0mm D/R R/A DIP TYPE				頁數 Page	1/1
品號 PART NO.	5PH2DRA15-4XXXXNXXU -XXXXXXXXXX-00				繪圖 DRAWN	Nick 2019/09/04
圖號 DRAWING NO.	GN003-NI344	版本 REV.	B	核對 CHECKED	Josh 2019/09/04	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/09/04	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO.:221005 Revise the drawing	Tim	2022/11/10
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE