

MATERIAL 
Insulator: Nylon 9T, UL 94V-0,Black
Contact Pin: Brass

ORDER INFORMATION

5PH2DRA20-2XXXNNU-A1B-00

2:Dual Row

No. of contacts
Per Row(01~50)

G0:Gold Flash

GA: Au 5u"

GB: Au 10u"

GC: Au 20u"

GD: Au 30u"

T0: Tin Plated

S0: Selective Au

SA: Selective Au 5u"

SB: Selective Au 10u"

SC: Selective Au 20u"

SD: Selective Au 30u"

TE: Tin 200u"

N: Non Type

N: W/O Peg

U: RoHS
+Hi-Temp.

X: Box

B: Bag

EX: 040XXX035

A: 4.0

L1: As Required

B: 3.5

certified


Pb

RoHS Compliant

AMTEK 耀德

2023.05.11

Released DCC

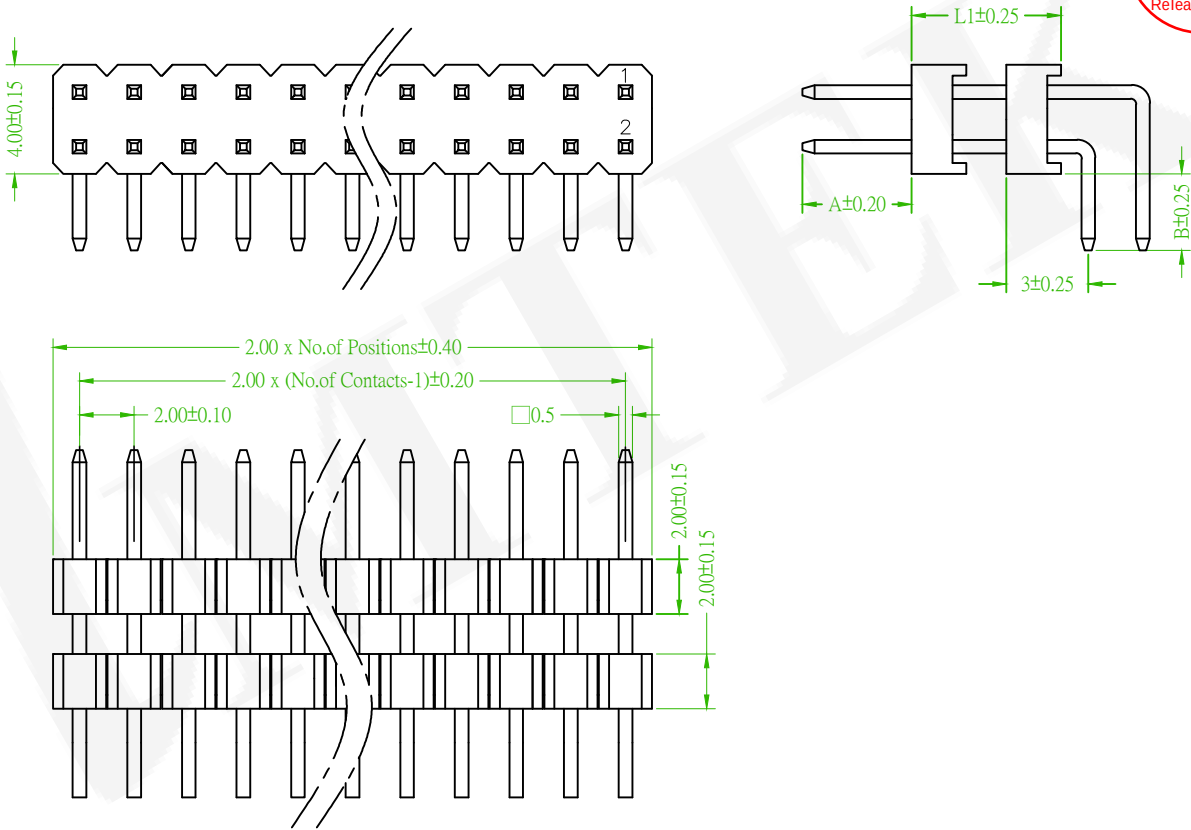

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

REV.	ECN NO.:221005 Revise the drawing	Tim	2022/11/10
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.0mm D/R R/A DIP TYPE				頁數 Page	1/1
品號 PART NO.	5PH2DRA20-2XXXXNNU -XXXXXXXXXX-00				繪圖 DRAWN	Mia 2018/08/17
圖號 DRAWING NO.	GN003-MD393	版本 REV.	B	核對 CHECKED	Josh 2018/08/17	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/08/17	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		