

MATERIAL 
Insulator: Nylon 9T, UL 94V-0,Black
Contact Pin: Brass

ORDER INFORMATION

5 P H 2 M R A 1 5 - 1 X X X X N N X U - A 000 000 - 0 0

1:Single Row

No. of contacts
Per Row(02~40)

G0:Gold Flash	S0:Selective Au
GA:Au 5u"	SA:Selective Au 5u"
GB:Au 10u"	SB:Selective Au 10u"
GC:Au 20u"	SC:Selective Au 20u"
GD:Au 30u"	SD:Selective Au 30u"
T0:Tin Plated	TE:Tin 200u"

N:Non Type

U:RoHS
+Hi-Temp.





EX:040000000
A:4.0

N:W/O Peg

R:T/R With Cap
H:T/R W/O Cap
C:Tube With Cap
T:Tube W/O Cap



AMTEK 耀德
2023.05.11
Released DCC

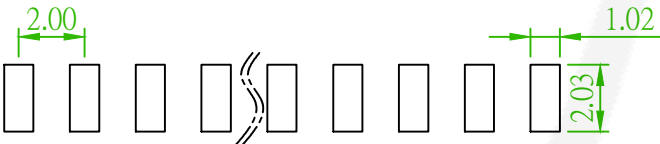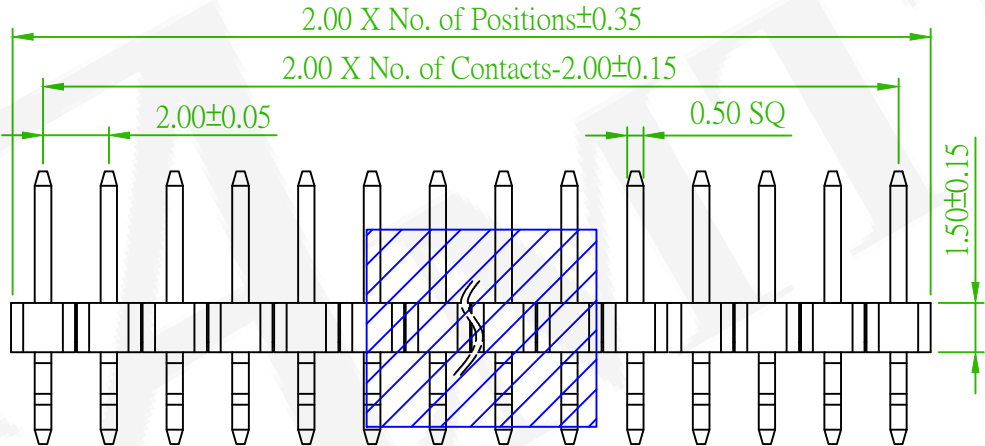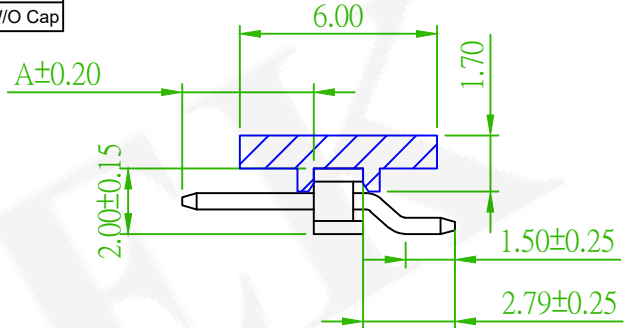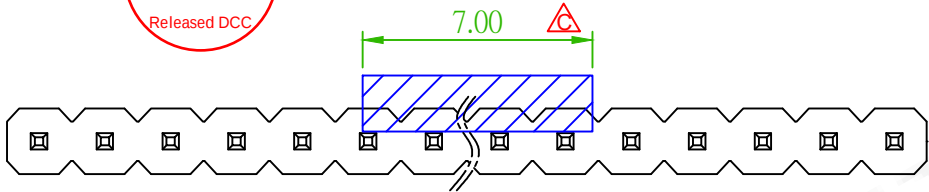

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No. : PH2MR15-1XXXBXOXA-U

 X1	ECN NO.:221005 Revise the drawing	Tim	2022/11/10
 X1	Add the Cap	Mia	2018/09/11
 X3	Modify order information	Gary	2017/02/02
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.0mm R/A S/R SMT TYPE				頁數 Page	1/1
品號 PART NO.	5PH2MRA15-1XXXXNXXU -XXX000000-00				繪圖 DRAWN	Athena 2015/08/14
圖號 DRAWING NO.	GN016-GA225	版本 REV.	D	核對 CHECKED	John 2015/08/14	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/14	
公差 TOLERANCE	.X ±0.38 .XX ±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		