






MATERIAL 
Insulator: Nylon 9T, UL 94V-0
Contact Pin: Brass

ORDER INFORMATION


5 P H 2 M R A 2 0 - 2 X X X X X X X U - A 000 000 - 0 0

AMTEK 耀德
2023.11.09
Released DCC

2: Dual Row	No. of contacts Per Row(02~40)	G0: Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0: Tin Plated	S0: Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u" TE: Tin 200u"	N: Non Type N: W/O Peg	U: RoHS +Hi-Temp.	EX: 040000000 A: 4.0 (Maximum Dim.A=7.5mm)
					R: T/R With Cap H: T/R W/O Cap C: Tube With Cap T: Tube W/O Cap M: T/R With Mylar	   

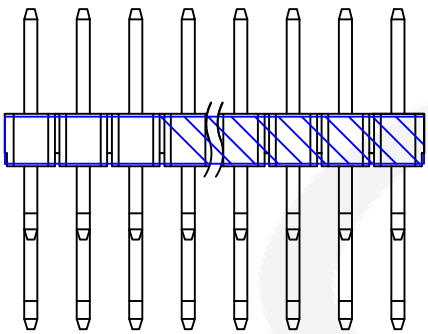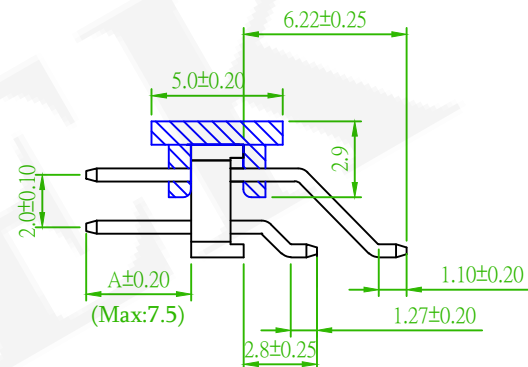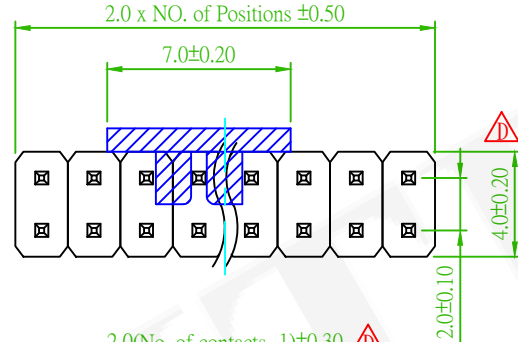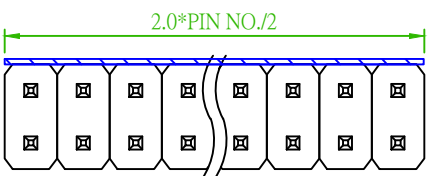

With Film

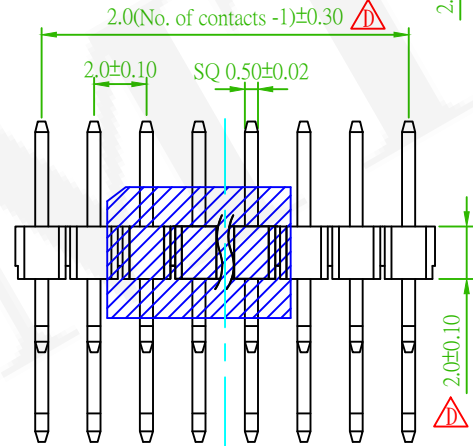

With Cap

Old Part No. : PH2MR20-2XX-U

	ECN NO.:231018 Revise the drawing	David	2023/11/02
	EasyFlow No.:202310030005 Add the Optious	Randy	2023/10/04
	ECN NO.:221005 Revise the drawing	Tim	2022/11/10
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.0mm PLASTIC HEIGHT 2.0mm R/A SMT				頁數 Page	1/1
品號 PART NO.	5PH2MRA20-2XXXXXXU -XXX000000-00				繪圖 DRAWN	Athena 2015/08/14
圖號 DRAWING NO.	GN016-GA227	版本 REV.	G	核對 CHECKED	John 2015/08/14	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/14	
公差 TOLERANCE	.X ±0.38 .XX ±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		