

MATERIAL

Insulator: Nylon 9T,UL 94V-0,Black

Contact Pin: Brass

ORDER INFORMATION

5 P H 2 M S A 1 5 - 1 X X X X N X X U - A B C - 0 0


1:Single Row	No. of contacts Per Row(02~40)	G0:Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0: Tin Plated	S0:Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u" TE: Tin 200u"	A-A TYPE (Odd Pin&Even Pin) B-B TYPE (Only Even Pin)	U:RoHS +Hi-Temp.	EX:04004207 A:4.0 B:4.2 C:2.7
				N:W/O Peg	R:T/R With Cap H:T/R W/O Cap C:Tube With Cap (5 Pin ↑) T:Tube W/O Cap (5 Pin ↑) X:Box	




CAP	L	W	H (Ref.)
≥ 1 x 2 Pin	5.0	5.08	4.5

A Type


B Type

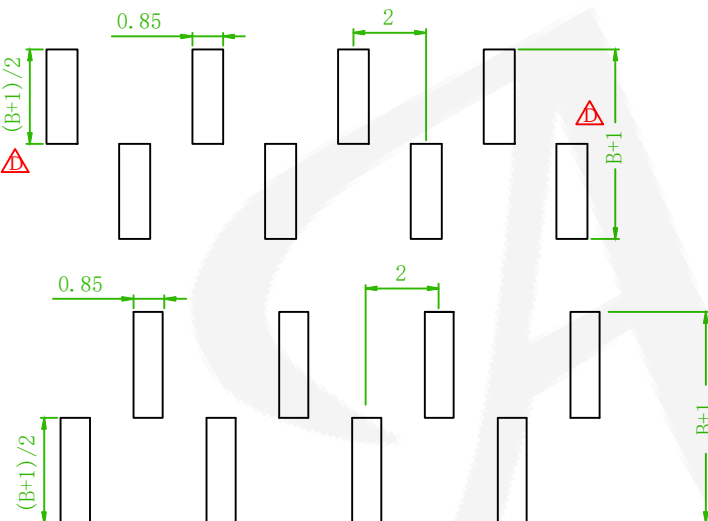



Recommended PCB Layout
(PCB TOLERANCE ±0.1)

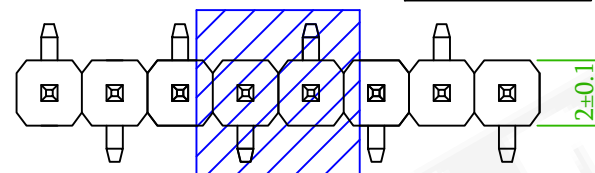

A Type

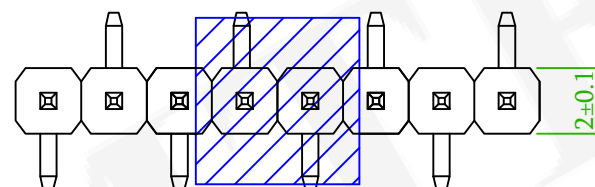

B Type

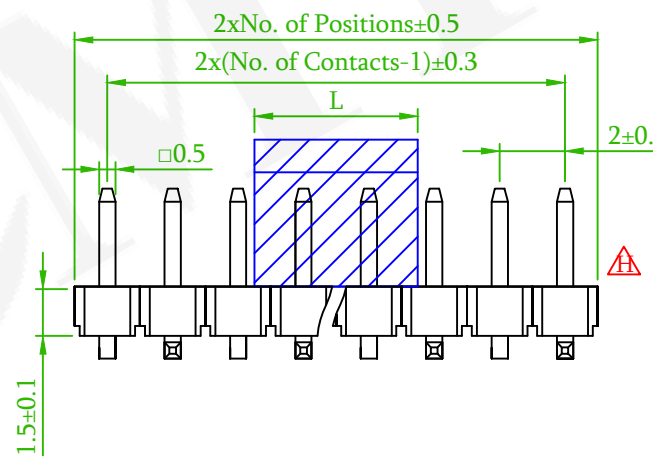

Old Part No. : PH2M15-1XX-U

△x2	ECN NO.:210916 Revise the drawing	Alice	2021/10/7
△A	Remove dimension	Eric	2018/11/14
△A	Add the Package option: X : Box	Roy	2018/03/26
△A	ECN No.:171201, Revise the Cap.	Roy	2017/12/01
△A	Add the B Type and annotations.	Mia	2017/04/28
△A	Modify P.C.B Layout	Gary	2017/03/20
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

AMTEK
 耀德精密有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.0mm S/R V/T SMT TYPE				頁數 Page	1/1
品號 PART NO.	△ 5PH2MSA15-1XXXXNXXU -XXXXXXXXXX-00				繪圖 DRAWN	Athena 2015/08/17
圖號 DRAWING NO.	GN016-GA228	版本 REV.	I	核對 CHECKED	Josh 2018/11/14	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/11/14	
公差 TOLERANCE	.X ±0.38 .XX ±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		