

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass


ORDER INFORMATION

5 P H 2 M S A 1 5 - 2 X X X X N N X U - A B C - 0 0




2: Dual Row	No. of contacts Per Row(02~50)	G0: Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0: Tin Plated	S0: Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u" TE: Tin 200u"	N: Non Type N: W/O Peg	U: RoHS+Hi-Temp. R: T/R With Cap H: T/R W/O Cap C: Tube With Cap T: Tube W/O Cap	EX: 040062027 A: 4.0 B: 6.2 C: 2.7
-------------	-----------------------------------	---	--	---------------------------	--	---



CAP	L	W	H (Ref.)
$\cong 2 \times 2$ Pin	6.5	6.5	4.5

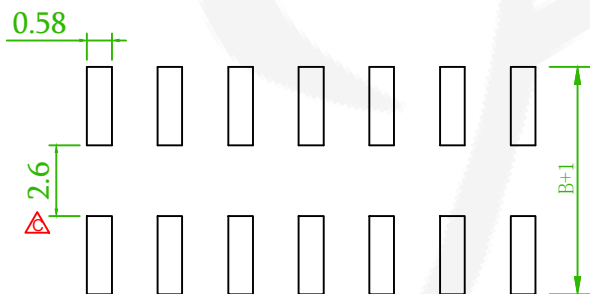

Recommended PCB Layout
(PCB TOLERANCE ± 0.1)

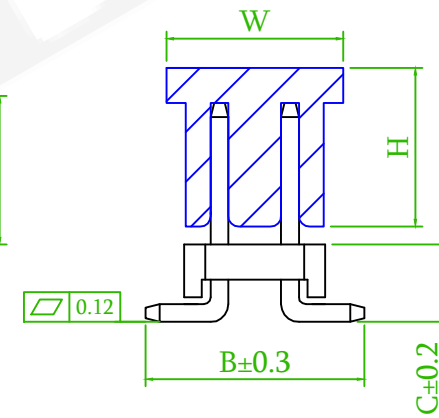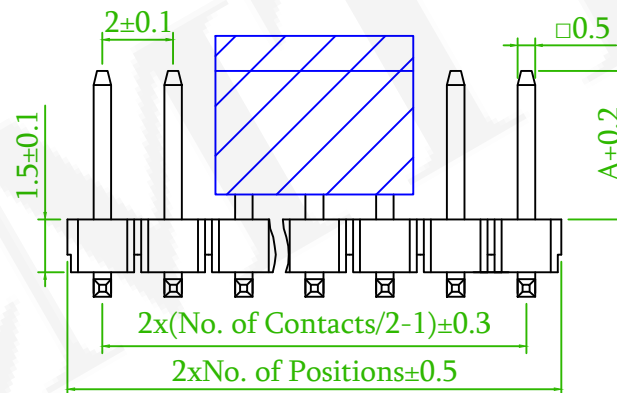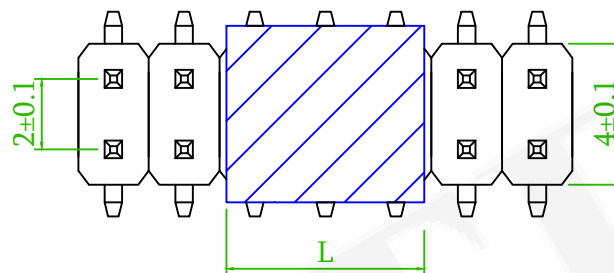

Old Part No. : PH2M15-2XX-U

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 2.0mm				頁數 Page	1/1
	品號 PART NO.	5PH2MSA15-2XXXXNXXU -XXXXXXXXXX-00				繪圖 DRAWN	Mia 2016/12/05
	圖號 DRAWING NO.	GA000-MC111	版本 REV.	E	核對 CHECKED	Jonny 2016/12/05	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/12/05	
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

	ECN NO.:221005 Revise the drawing	Tim	2022/11/10
	ECN No.:171201, Revise the Cap.	Roy	2017/12/01
	Modify P.C.B Layout	Gary	2017/03/17
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE