

MATERIAL

Insulator: Nylon 9T, UL 94V-0, Black
Contact Pin: Brass

ORDER INFORMATION

5 P H 2 M S A 2 0 - 1 X X X X N X X U - A B C - 0 0

1:Single Row

No. of contacts
Per Row(02~40)

G0:Gold Flash
GA: Au 5u"
GB: Au 10u"
GC: Au 20u"
GD: Au 30u"
T0: Tin Plated

S0: Selective Au
SA: Selective Au 5u"
SB: Selective Au 10u"
SC: Selective Au 20u"
SD: Selective Au 30u"
TE: Tin 200u"

N: W/O Peg

A: A Type
(Odd & Even Pin)
B: B Type
(Only Even Pin)

U: RoHS
+Hi-Temp.



EX: 040042027
A: 4.0
B: 4.2
C: 2.7

R: T/R With Cap
H: T/R W/O Cap
C: Tube With Cap (5 Pin ↑)
T: Tube W/O Cap (5 Pin ↑)



AMTEK 糧德
2023.05.11
Released DCC

CAP	L	W	H (Ref.)
≥ 1 x 2 Pin	5.0	5.08	4.5

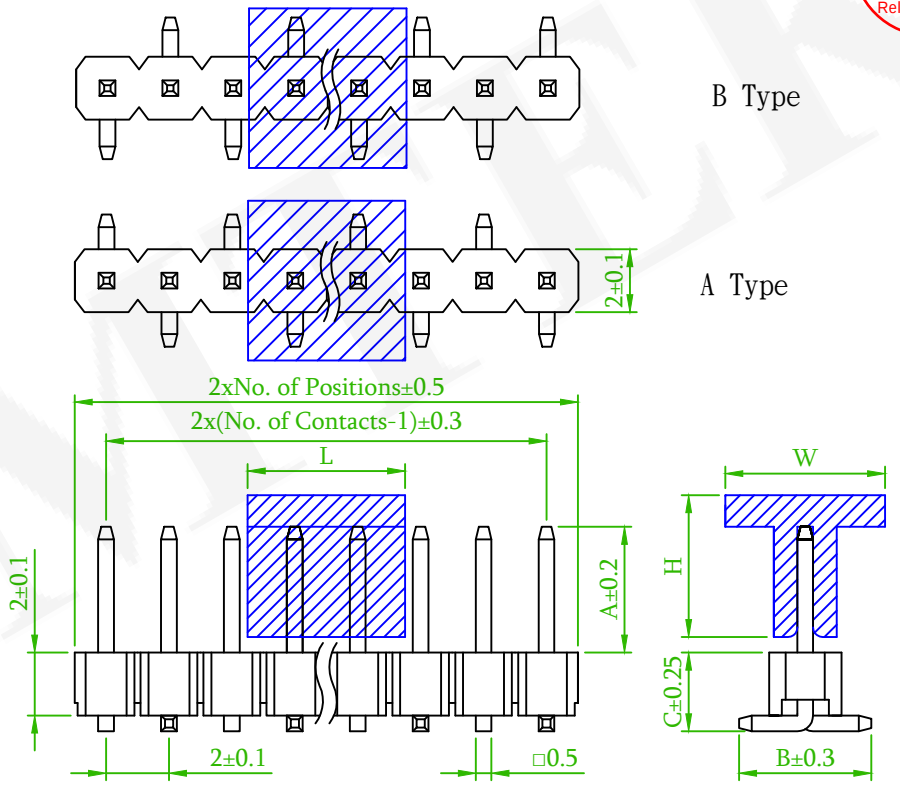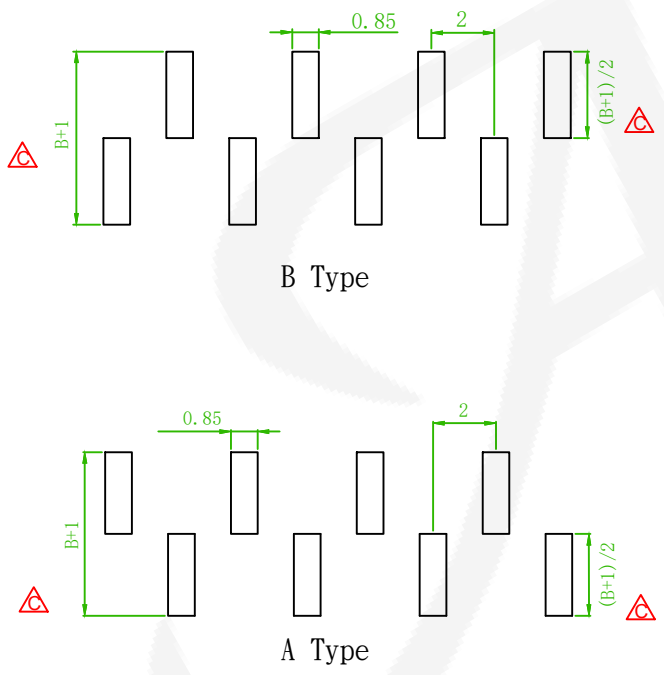

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 2.0mm				頁數 Page	1/1
	品號 PART NO.	5PH2MSA20-1XXXXNXXU -XXXXXXXXXX-00				繪圖 DRAWN	Roy 2016/03/03
	圖號 DRAWING NO.	GN016-GA229	版本 REV.	F	核對 CHECKED	Mavis 2016/03/03	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2016/03/03	
	公差 TOLERANCE	.X±0.38 .XX±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO.:221005 Revise the drawing	Tim	2022/11/10
	ECN No.:171201, Revise the Cap.	Roy	2017/12/01
	ECN No.:170503. Add annotations.	Gary	2017/06/12
	ECN NO. OR DESCRIPTION	REVISED	DATE