

MATERIAL

Insulator: Nylon 9T,UL94V-0,Black
Contact Pin: Brass





ORDER INFORMATION

5 P H 2 M S A 2 0 - 2 X X X X X N X U - A/B/C - 0 0

2: Dual Row	No. of contacts Per Row(52-56)	GA: Gold Flash GB: 10u" GC: 20u" GD: 30u"	SA: Selective SB: 10u" SC: 20u" SD: 30u"	N: Non Peg P: With Peg	N: Non Type	RoHS	EX: 039028022 A: 3.9(039) B: 2.8(028) C: 2.2(022)
		TG: Tin Plated TE: Tin 200u"				ES: Bag W/O Cap TT: Tube W/O Cap CT: Tube With Cap HT: Tape & Reel W/O Cap RT: Tape & Reel With Cap	



CAP	L	W	H (Ref.)
≥ 2 x 2 Pin	6.5	6.5	4.5

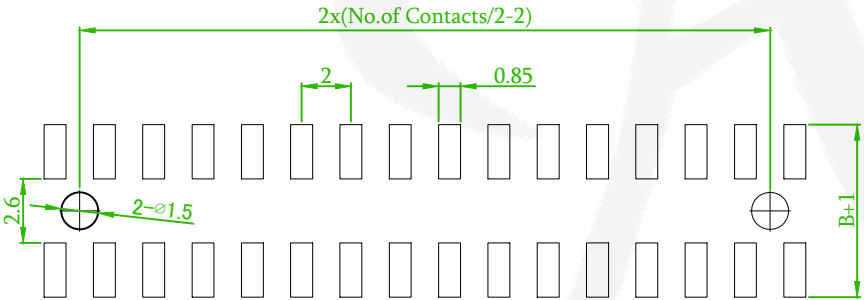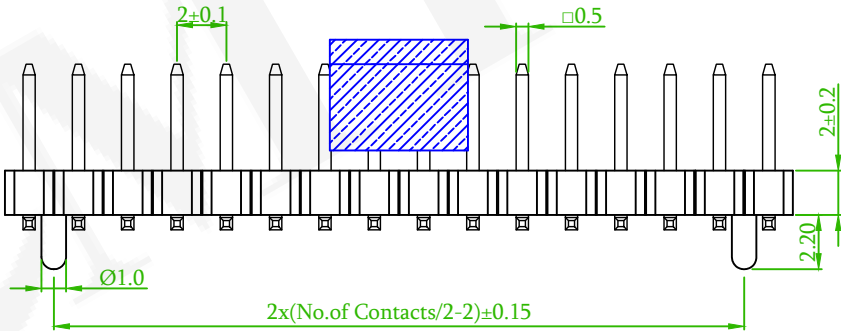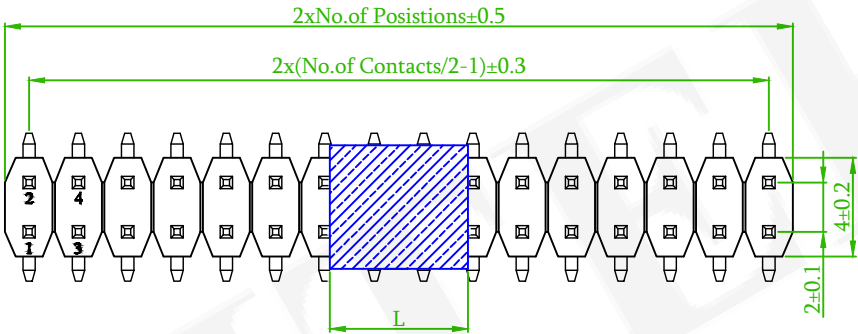

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

Old Part No. :PH2M20-2XX-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△X1	ECN NO.:221005 Revise the drawing	Tim	2022/11/10
△	ECN No. :171201,Revise the Cap	Roy	2017/12/01

AMTEK 糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.00mm				頁數 Page	1/1
品號 PART NO.	5PH2MSA20-2XXXXXXNXU -XXXXXXXXXX-00				繪圖 DRAWN	Athena 2015/08/18
圖號 DRAWING NO.		版本 REV.	C	核對 CHECKED	John 2015/08/18	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/18	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	X° ± 3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	