

MATERIAL






Insulator: Nylon 6T, UL 94V-0

Contact Pin: Brass

ORDER INFORMATION

5 P H 2 R D A 1 5 - 1 X X X X N N X U - A B C - 0 0

1: Single Row	No. of contacts Per Row(02~40)	G0: Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0: Tin Plated	S0: Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u" TE: Tin 200u"	N: Non Type N: W/O Peg	U: RoHS X: Box C: Tube With Cap M: T/R With Mylar	EX: 035030030 A: 3.5 B: 3.0 C: 3.0
---------------	-----------------------------------	---	--	---------------------------	--	---

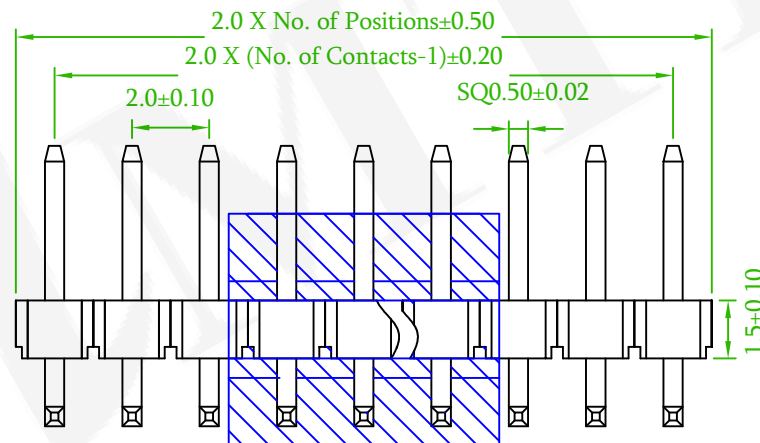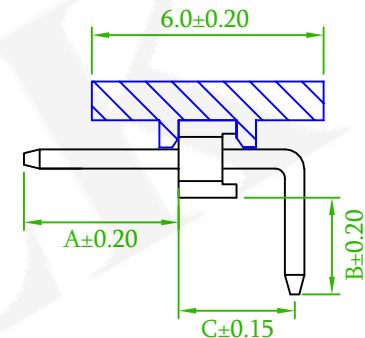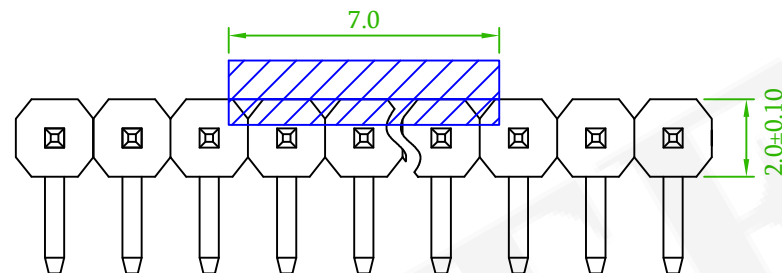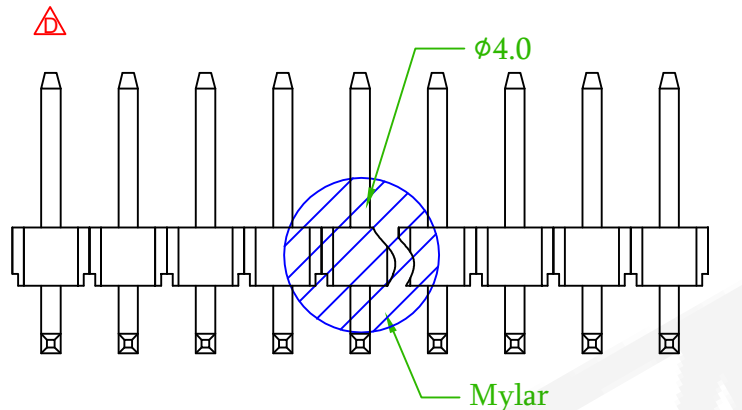


Recommended PCB Layout
(PCB TOLERANCE ±0.05)



Old Part No. : PH2R15-1XX-U

△x2	Add: T/R With Mylar	David	2021/12/28
△x2	ECN NO.:210916 Revise the drawing	Alice	2021/10/20
△	Modify order information	B	2017/02/03 Gary
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



品名 TITLE	PIN HEADER 2.0mm PLASTIC HEIGHT 1.5mm DIP R/A				頁數 Page	1/1
品號 PART NO.	5PH2RDA15-1XXXXNNXU -XXXXXXXXXX-00				繪圖 DRAWN	Athena 2015/08/18
圖號 DRAWING NO.	GN016-GA233	版本 REV.	D	核對 CHECKED	John 2015/08/18	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/18	
公差 TOLERANCE	.X ±0.25 .XX ±0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		