





MATERIAL

Insulator: Nylon 9T, UL 94V-0
Contact Pin: Brass

ORDER INFORMATION

5 P H 2 R D A 1 5 - 2 X X X X X X X U - A B C - 0 0

2: Dual Row	No. of contacts Per Row(02~40)	G0: Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0: Tin Plated	S0: Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u" TE: Tin 200u"	N: Non Type N: W/O Peg	U: RoHS +Hi-Temp.	EX: 035024030 A: 3.5 B: 2.4 C: 3.0
				X: Box C: Tube With Cap H: T/R W/O Cap R: T/R With Cap		

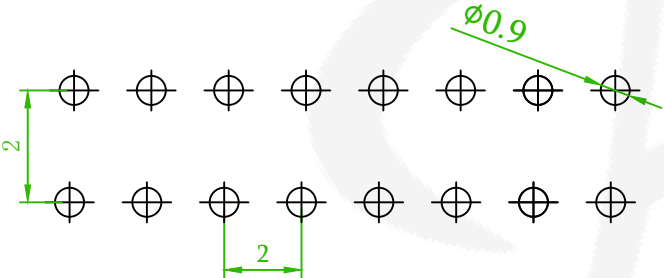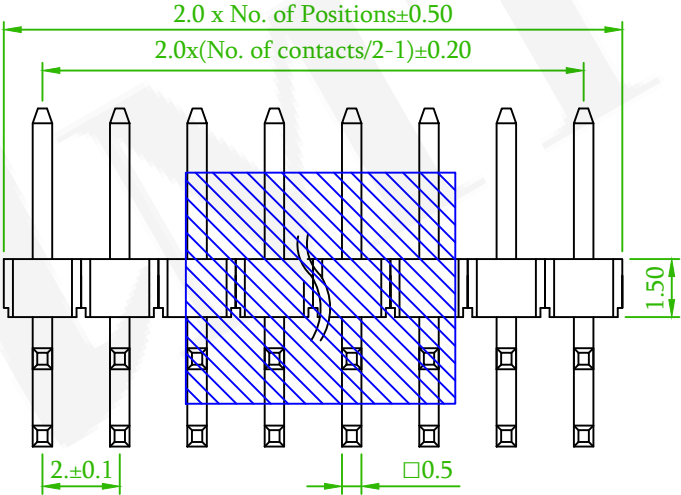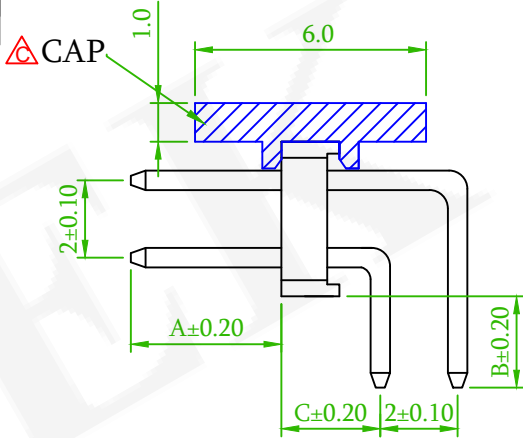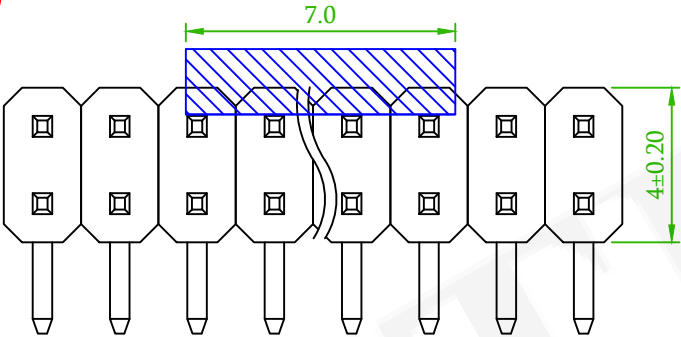

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No. : PH2R15-2XX-U

ΔX5	ECN NO.: 221005 Revise the drawing	Rex	2023/03/14
△	Add:CAP	David	2019/09/16
△	Modify order information	B	2017/02/03 Gary
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.0mm PLASTIC HEIGHT 1.5mm DIP R/A				頁數 Page	1/1
品號 PART NO.	△ 5PH2RDA15-2XXXXXXXU -XXXXXXXXXX-00				繪圖 DRAWN	Athena 2015/08/17
圖號 DRAWING NO.	GN016-GA235	版本 REV.	D	核對 CHECKED	John 2015/08/17	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/17	
公差 TOLERANCE	.X ±0.38 .XX ±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		