

MATERIAL

Insulator: Nylon 6T, UL 94V-0

Contact Pin: Brass

ORDER INFORMATION

5 P H 2 R D A 2 0 - 1 X X X X N N X U - A B C - 0 0





1:Single Row	No. of contacts Per Row(02~40)	G0:Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0: Tin Plated	S0:Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u" TE: Tin 200u"	N:Non Type N:W/O Peg	X:Box C:Tube With Cap	U:RoHS	EX:035030030 A:3.5 B:3.0 C:3.0
--------------	-----------------------------------	--	---	-------------------------	--------------------------	--------	---



AMTEK 糧德

2021.10.29

Released DCC

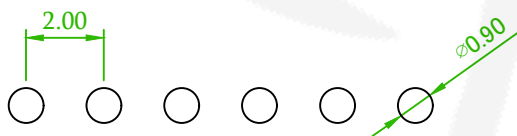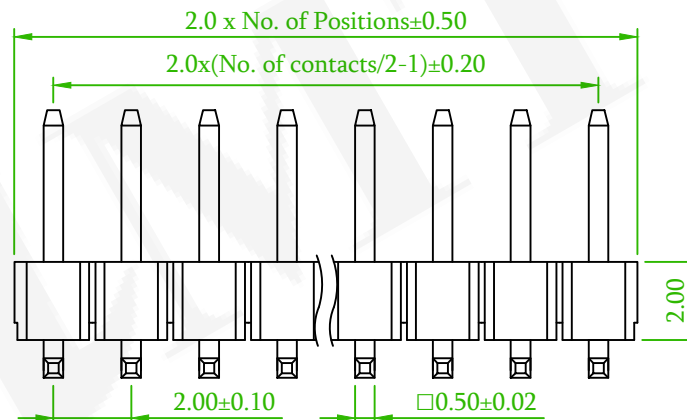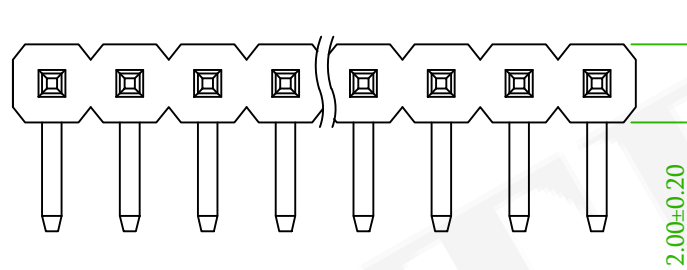

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No. : PH2R20-1XX-U

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 2.0mm PLASTIC HEIGHT 2.0mm DIP R/A				頁數 Page	1/1
	品號 PART NO.	5PH2RDA20-1XXXXNXXU -XXXXXXXXXX-00				繪圖 DRAWN	Mia 2016/09/21
	圖號 DRAWING NO.	GW001-GA263	版本 REV.	C	核對 CHECKED	Jonny 2016/09/21	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/09/21	
	公差 TOLERANCE	.X ±0.25 .XX ±0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		

△x2	ECN NO.:210916 Revise the drawing	Alice	2021/10/20
△B	Modify order information	B	2017/02/06 Gary
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE