





MATERIAL

Insulator: Nylon 9T, UL 94V-0
Contact Pin: Brass

ORDER INFORMATION

5 P H 2 R D A 2 0 - 3 X X X X N N X U - A B C - 0 0

3:Triple Row	No. of contacts Per Row(02~40)	G0:Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0: Tin Plated	S0: Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u" TE: Tin 200u"	N: Non Type N: W/O Peg	U: RoHS+Hi-Temp. X: Box B: Bag C: Tube With Cap	EX: 035030030 A: 3.5 B: 3.0 C: 3.0
--------------	-----------------------------------	--	--	---------------------------	--	---

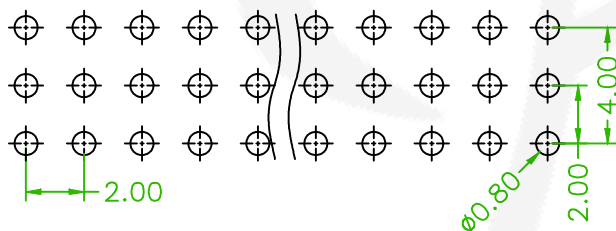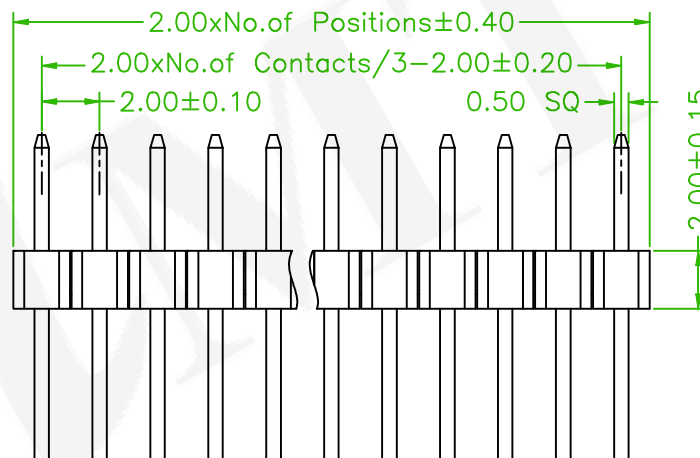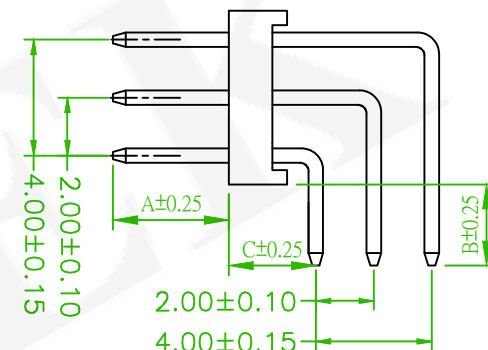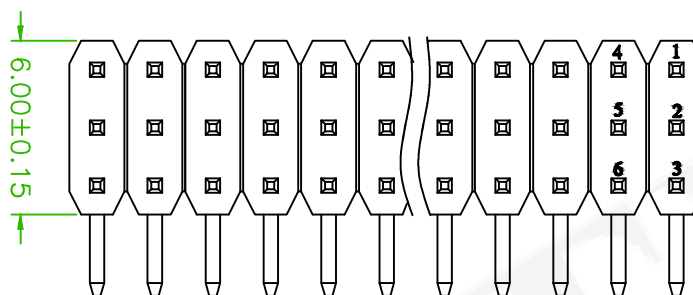

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Old P/N : PH2R20-3XX-U

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 2.0mm RIGHT ANGLE TYPE PLASTIC HEIGHT 2.0mm				頁數 Page	1/1
	品號 PART NO.	5PH2RDA20-3XXXXNNXU -XXXXXXXXXX-00				繪圖 DRAWN	Joe 2009/04/01
	圖號 DRAWING NO.	GN003-GA023	版本 REV.	C	核對 CHECKED	Paul 2009/04/01	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2009/04/01	
	公差 TOLERANCE	.X ±0.38 .XX ±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

△x1	ECN NO.:221005 Revise the drawing	Tim	2022/11/10
△	Modify order information	B	2017/02/03 Gary
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE