

MATERIAL

Insulator: Nylon 9T, UL 94V-0
Contact Pin: Brass





ORDER INFORMATION

5 P H 2 R D A 2 0 - 4 X X X X N N X U - A B C - 0 0

4: Quad Row	No. of contacts Per Row(01~50)	N:W/O Peg	N:Non Type	U:RoHS+Hi-Temp.	EX:035030030 A:3.5 B:3.0 C:3.0
G0:Gold Flash	S0:Selective Au	X:Box	B:Bag		
GA:Au 5u"	SA:Selective Au 5u"	C:Tube With Cap			
GB:Au 10u"	SB:Selective Au 10u"				
GC:Au 20u"	SC:Selective Au 20u"				
GD:Au 30u"	SD:Selective Au 30u"				
T0:Tin Plated	TE:Tin 200u"				



AMTEK 耀德
2023.05.11
Released DCC

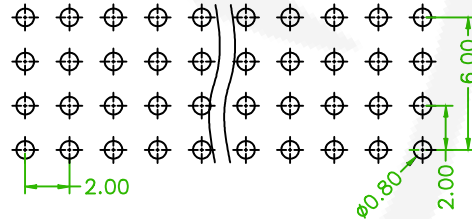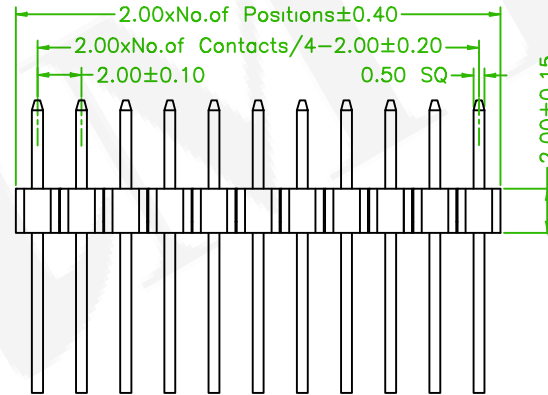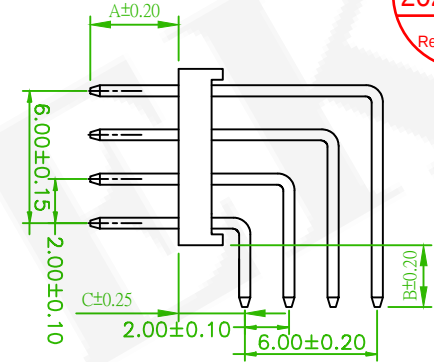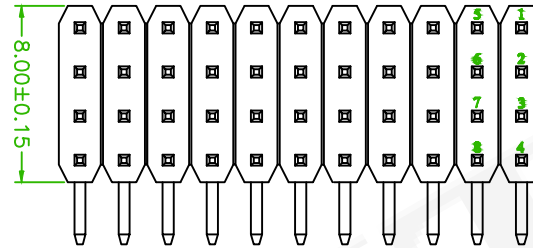

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Old P/N : PH2R20-4XX-U

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 2.0mm RIGHT ANGLE TYPE PLASTIC HEIGHT 2.0mm				頁數 Page	1/1
	品號 PART NO.	5PH2RDA20-4XXXXNXXU -XXXXXXXXXX-00				繪圖 DRAWN	Sam 2009/04/02
	圖號 DRAWING NO.	GN003-GA024	版本 REV.	C	核對 CHECKED	Paul 2009/04/02	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2009/04/02	
	公差 TOLERANCE	.X ±0.38 .XX ±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△X1	ECN NO.:221005 Revise the drawing	Tim	2022/11/10
△B	Modify order information	B	2017/02/03 Gary