

MATERIAL




Insulator: Nylon 9T, UL 94V-0 △

Contact Pin: Brass △


ORDER INFORMATION

5 P H 2 R D A 4 0 - 2 X X X X N N X U - A B 000 - 0 0

2: Dual Row	No. of contacts Per Row(02~40)	G0: Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0: Tin Plated	S0: Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u" TE: Tin 200u"	N: Non Type	N: Non Peg	X: Box T: Tube W/O Cap M: T/R With Mylar	U: RoHS +Hi-Temp.	EX: 035024000 A: 3.5 B: 2.4
-------------	-----------------------------------	---	--	-------------	------------	--	----------------------	-----------------------------------

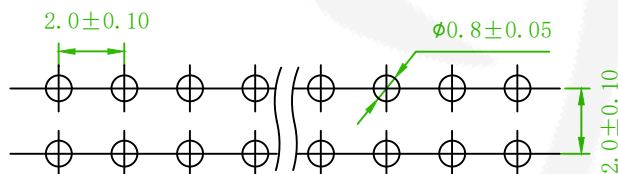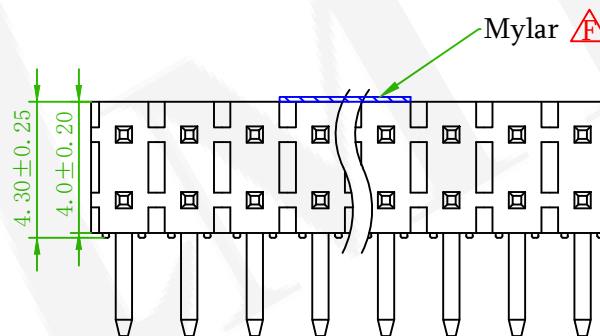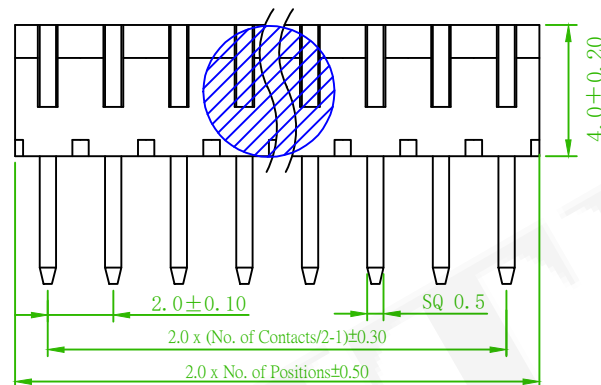

P. C. B LAYOUT

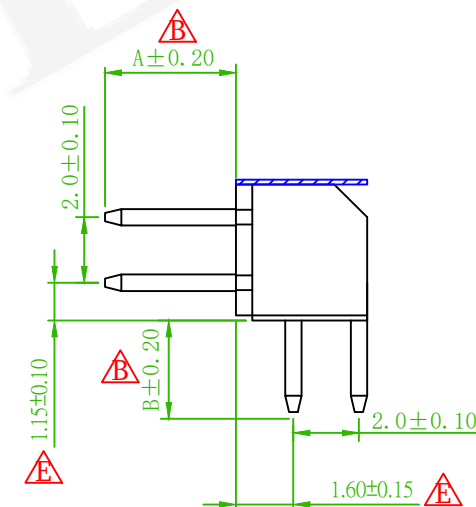

Old Part No. : PH2R40-2XX-U

△ x2	ECN NO.:210916 Revise the drawing	Alice	2021/10/7
△ x2	Add:T/R With Mylar	David	2019/09/11
△	ECN NO.:170548 Revise the drawing 1.1.0±0.10->1.15±0.10 2.1.50±0.10->1.60±0.15	E	2017/06/30 Mia
△	ECN NO.:170526 Removed the Cap	D	2017/05/19 Mia
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

AMTEK
糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.0mm PLASTIC HEIGHT 4.0mm DIP R/A				頁數 Page	1/1
品號 PART NO.	5PH2RDA40-2XXXXNXXU -XXXXXX000-00				繪圖 DRAWN	Athena 2015/08/17
圖號 DRAWING NO.	GN016-MC058	版本 REV.	G	核對 CHECKED	John 2015/08/17	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/17	
公差 TOLERANCE	.X ±0.38 .XX ±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		