

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black

Contact Pin: Brass

ORDER INFORMATION

5 P H 2 S D A 1 5 - 1 X X X X

1:Single Row

No. of contacts
Per Row(02~50)

G0:Gold Flash

GA: Au 5u"

GB: Au 10u"

GC: Au 20u"

GD: Au 30u"

T0: Tin Plated

S0: Selective Au

SA: Selective Au 5u"

SB: Selective Au 10u"

SC: Selective Au 20u"

SD: Selective Au 30u"

TE: Tin 200u"

N N X U - A B 000 - 0 0

N: W/O Peg

X: Box

B: Bag

RoHS




EX: 039028000

A: 3.9

B: 2.8



AMTEK 耀德
2021.10.29
Released DCC

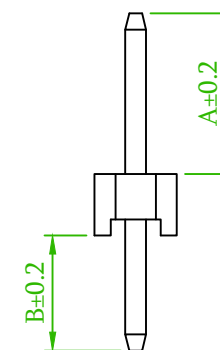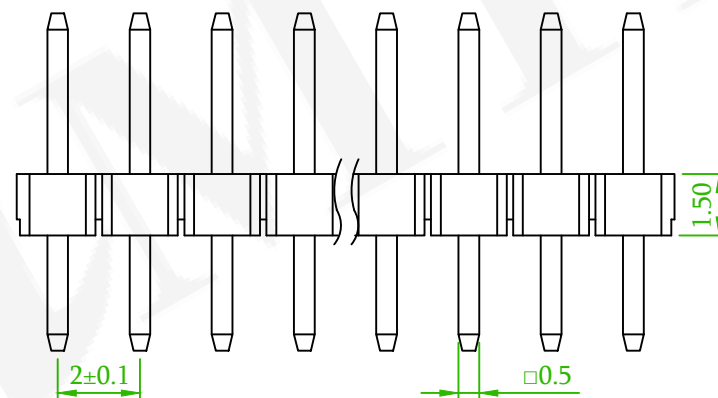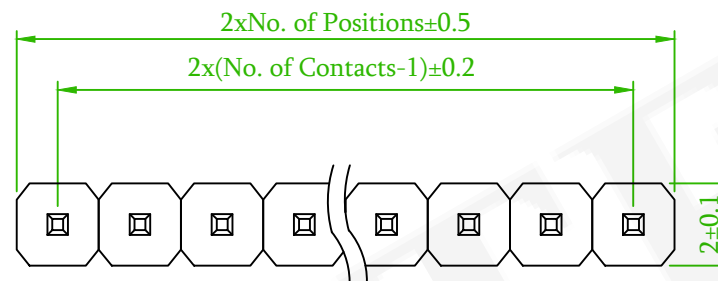

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

Old Part No. : PH2S15-1XX-U

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 2.0mm S/R V/T DIP TYPE				頁數 Page	1/1
	品號 PART NO.	5PH2SDA15-1XXXXNNU -XXXXXX000-00				繪圖 DRAWN	Jeff 2016/09/14
	圖號 DRAWING NO.	GN016-GA239	版本 REV.	E	核對 CHECKED	Josh 2018/03/22	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/03/22	
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

△x2	ECN NO.:210916 Revise the drawing	Alice	2021/10/07
△	ECN No.:180310,Remove the Cap & Revise the Package option .	Roy	2018/03/22
△	ECN No.:171201, Revise the Cap.	Roy	2017/12/01
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE