

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black

Contact Pin: Brass

ORDER INFORMATION

5 P H 2 S D A 1 5 - 2 X X X X X

N N X U - A B 000 - 0 0



2: Dual Row

No. of contacts
Per Row(02~40)

G0: Gold Flash

GA: Au 5u"

GB: Au 10u"

GC: Au 20u"

GD: Au 30u"

S0: Selective Au

SA: Selective Au 5u"

SB: Selective Au 10u"

SC: Selective Au 20u"

SD: Selective Au 30u"

T0: Tin Plated

TE: Tin 200u"

N: W/O Peg

X: Box

B: Bag

R: T/R With Cap

RoHS

EX: 0390280000

A: 3.9



B: 2.8



NOTE 1


Package For Tape & Reel With CAP:

5PH2SDA15-2XXXXNNRU-XXX XXX XXX-00






R: T/R With Cap

DIM.A add DIM.B add 1.5mm must be less than 23mm.

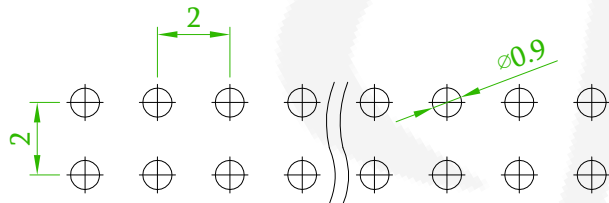

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

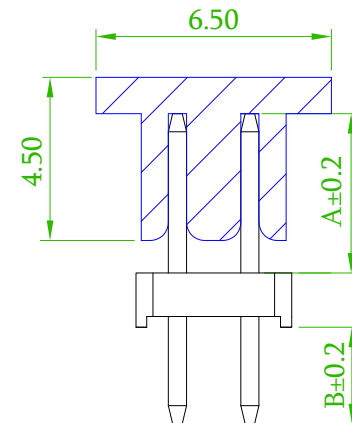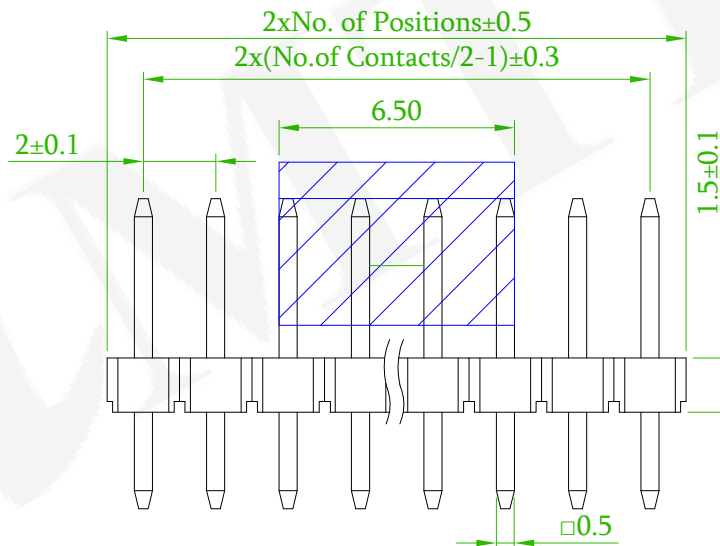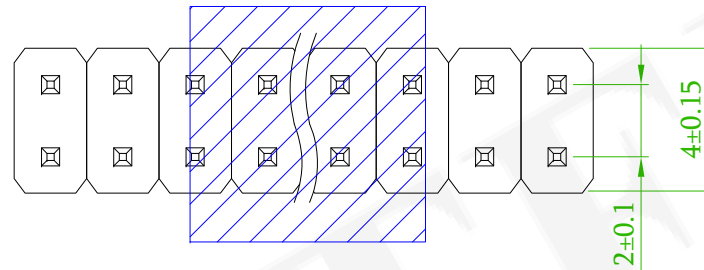

Old Part No. : PH2S15-2XX-U

x2

Add the package options

Benson

2022/09/29

x2

ECN NO.: 210916 Revise the drawing

Alice

2021/10/07

Add the GF: Au 15u"

Benson

2019/11/05

REV.

ECN NO. OR DESCRIPTION

REVISED

DATE



Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE		PIN HEADER 2.0mm D/R V/T DIP TYPE			頁數 Page	1/1
品號 PART NO.		5PH2SDA15-2XXXXNNXU -XXXXXX000-00			繪圖 DRAWN	Jeff 2016/09/08
圖號 DRAWING NO.		GN016-GA241	版本 REV.	G	核對 CHECKED	Josh 2018/03/23
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Jason 2018/03/23
公差 TOLERANCE		.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION	