

MATERIAL 
Insulator: Nylon 9T, UL 94V-0
Contact Pin: Brass

ORDER INFORMATION

5

P

H

2

S

D

A

1

5

-

4

X

X

X

X

N

N

X

U

-

A

B

000

-

0

0

4: Quad Rows

No. of contacts
Per Row(02~40)

G0: Gold Flash

GA: Au 5u"

GB: Au 10u"

GC: Au 20u"

GD: Au 30u"

T0: Tin Plated

S0: Selective Au

SA: Selective Au 5u"

SB: Selective Au 10u"

SC: Selective Au 20u"

SD: Selective Au 30u"

TE: Tin 200u"

N: Non Type

N: W/O Peg

U: RoHS
+Hi-Temp.

X: Box

B: Bag

C: Tube With Cap



EX: 040028000

A: 4.0



B: 2.8



AMTEK 耀德
2023.05.11
Released DCC

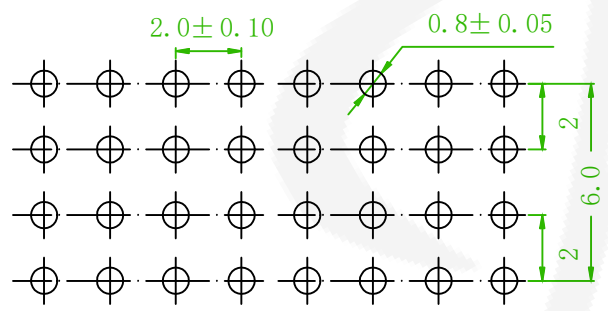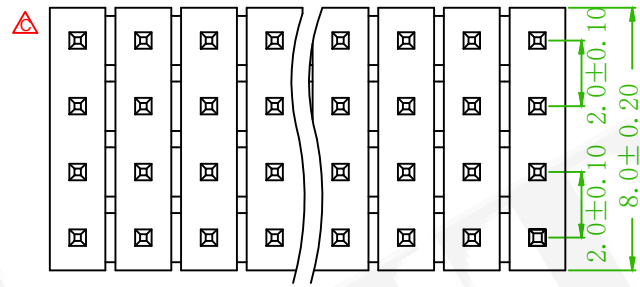

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

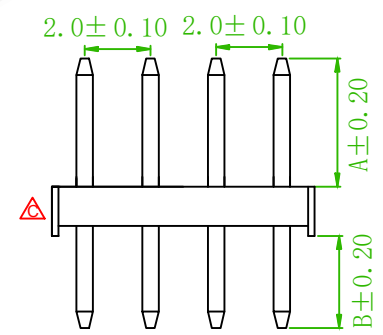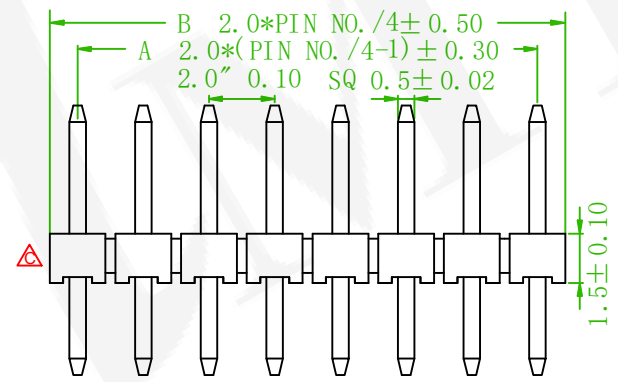

Old Part No. :PH2S15-4XX-U

 X1	ECN NO.:221005 Revise the drawing	Tim	2022/11/10
 x3	ECN NO.:200911 Revise the drawing	Alice	2020/10/06
	Modify order information	B	2017/02/03 Gary
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.0mm PLASTIC HEIGHT 1.5mm DIP STRAIGHT				頁數 Page	1/1
品號 PART NO.	5PH2SDA15-4XXXXNXXU -XXXXXX000-00				繪圖 DRAWN	Athena 2015/08/17
圖號 DRAWING NO.	GN016-GA242	版本 REV.	D	核對 CHECKED	John 2015/08/17	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/17	
公差 TOLERANCE	.X ±0.38 .XX ±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		