

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black 

Contact Pin: Brass 

ORDER INFORMATION

5 P H 2 S D A 2 0 - 1 X X X X N N X U - A B 000 - 0 0

1:Single Row

No. of contacts
Per Row(02~40)

G0:Gold Flash

GA: Au 5u"

GB: Au 10u"

GC: Au 20u"

GD: Au 30u"

T0: Tin Plated

S0: Selective Au

SA: Selective Au 5u"

SB: Selective Au 10u"

SC: Selective Au 20u"

SD: Selective Au 30u"

TE: Tin 200u"

N:W/O Peg

X:Box

B:Bag

RoHS

EX:039028000

A:3.9

B:2.9





AMTEK 糧德

2021.10.29


Released DCC



Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

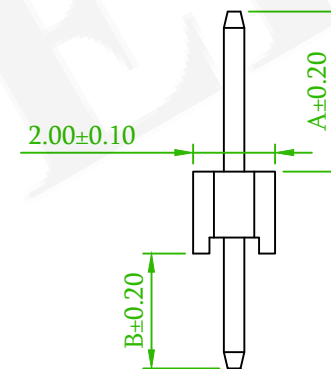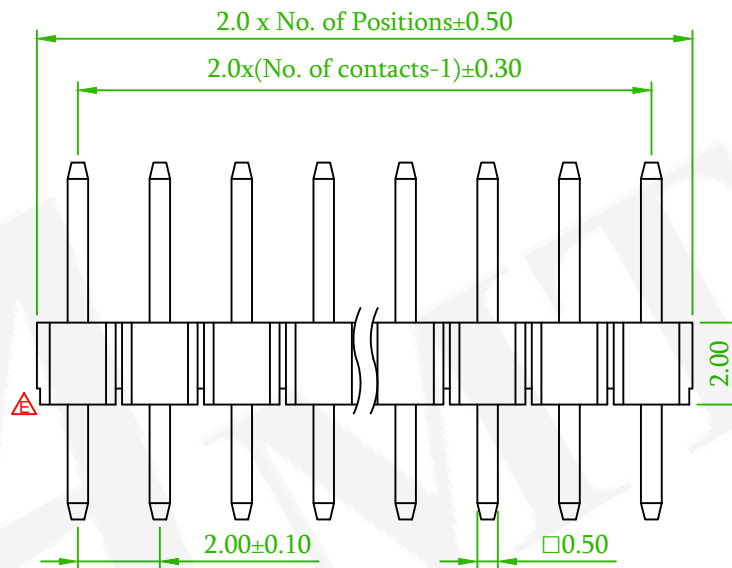

Old Part No. : PH2S20-1XX-U



品名 TITLE	PIN HEADER 2.0mm S/R V/T DIP TYPE				頁數 Page	1/1
品號 PART NO.	5PH2SDA20-1XXXXNXXU -XXXXXX000-00				繪圖 DRAWN	Athena 2015/08/17
圖號 DRAWING NO.	GN016-GA253	版本 REV.	F	核對 CHECKED	Josh 2018/03/22	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/03/22	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
 x2	ECN NO.:210916 Revise the drawing	Alice	2021/10/7
	Revise the drawing	Benson	2021/06/03
	ECN No.:180310,Remove the Cap & Revise the Package option .	Roy	2018/03/22