

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION






5PH2SDA20-2XXXXNXXNXXU-A000-00

2: Dual Row	No. of contacts Per Row(02~40)	G0: Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0: Tin Plated	S0: Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u" TE: Tin 200u"	N: W/O Peg	X: Box B: Bag H: T/R W/O Cap R: T/R With Cap	RoHS	EX: 039028000 A: 3.9 B: 2.8
-------------	-----------------------------------	---	--	------------	---	------	-----------------------------------



NOTE 1

Package For Tape & Reel With CAP:
5PH2SDA20-2XXXXNXXNXXU-XXX XXX 000-00
DIM. A
DIM. B
R: T/R With Cap
DIM. A add DIM. B add 2.00mm must be less than 23mm.

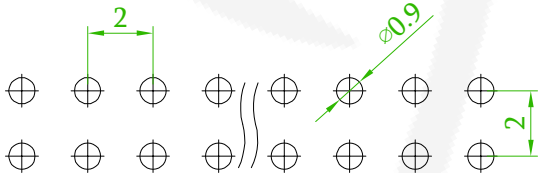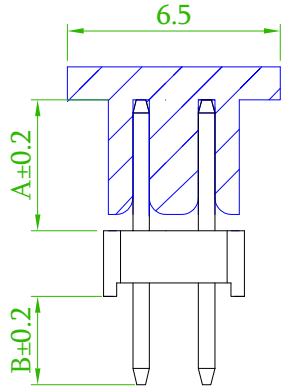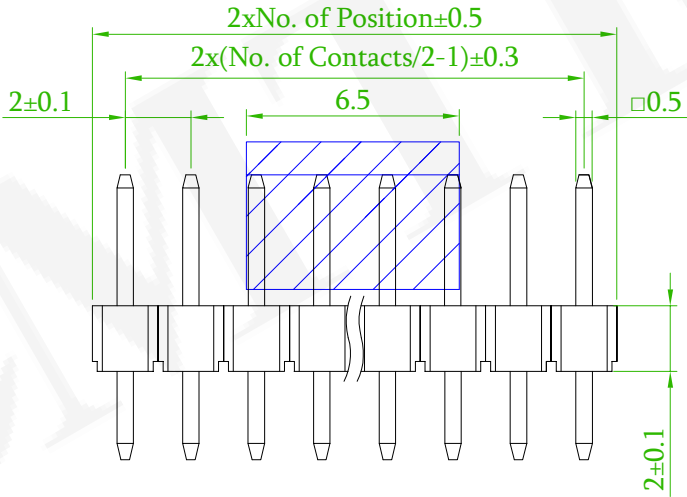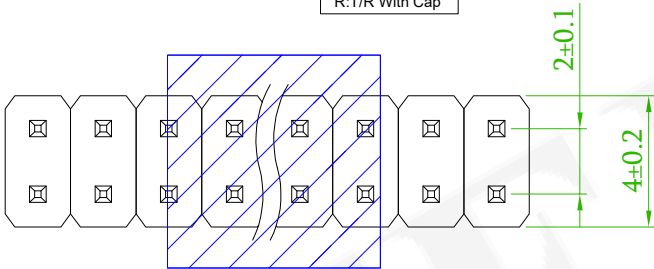

Recommended PCB Layout
(PCB TOLERANCE ±0.5)

Old Part No. : PH2S20-2XX-U

Easy Flow NO.:202309070002 Revise the drawing	Randy	2023/09/08
ECN NO.:210916 Revise the drawing	Alice	2021/10/7
ECN No.:180310, Remove the Cap & Revise the Package option .	Roy	2018/03/23
REV.	ECN NO. OR DESCRIPTION	REVISED DATE

耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.0mm D/R V/T DIP TYPE				頁數 Page	1/1
品號 PART NO.	5PH2SDA20-2XXXXNXXU -XXXXXX000-00				繪圖 DRAWN	Athena 2015/08/17
圖號 DRAWING NO.	GN016-GA255	版本 REV.	F	核對 CHECKED	John 2015/08/17	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/17	
公差 TOLERANCE	.X ±0.38 .XX ±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		