

MATERIAL

Insulator: Nylon 9T, UL94V-0
Contact Pin: Brass

ORDER INFORMATION

5PH2SDA20-3XXXXXXU-AB000-00

3:Triple Row

No. of contacts
Per Row(02~40)

G0:Gold Flash

GA: Au 5u"

GB: Au 10u"

GC: Au 20u"

GD: Au 30u"

T0: Tin Plated

S0: Selective Au

SA: Selective Au 5u"

SB: Selective Au 10u"

SC: Selective Au 20u"

SD: Selective Au 30u"

TE: Tin 200u"

N: Non Type

N: W/O Peg

U: RoHS +Hi-Temp.

X: Box

B: Bag

C: Tube With Cap


EX: 039028000

A: 3.9



B: 2.8



AMTEK 糧德
2023.02.20
Released DCC

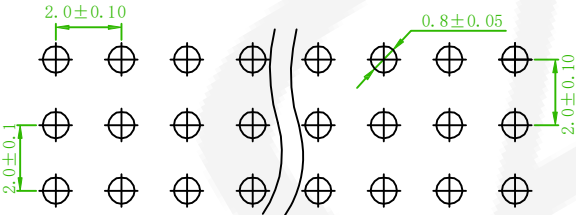

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

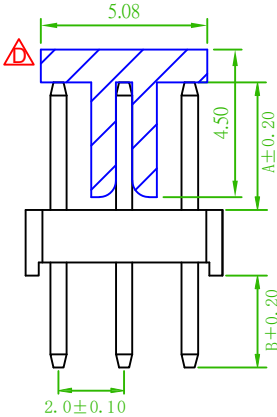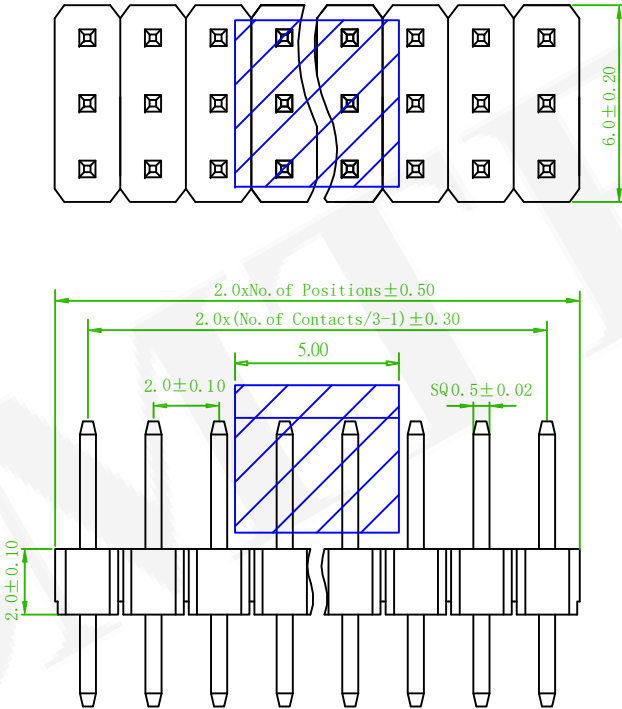

Old Part No. : PH2S20-3XX-U

△X1	Add the Cap	Benson	2023/02/20
△X1	ECN NO.:221005 Revise the drawing	Tim	2022/11/10
△	Modify order information	B	2017/02/03 Gary
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.0mm PLASTIC HEIGHT 2.0mm DIP STRAIGHT				頁數 Page	1/1
品號 PART NO.	5PH2SDA20-3XXXXXXU -XXXXXX000-00				繪圖 DRAWN	Roy 2016/07/21
圖號 DRAWING NO.	GN016-GA256	版本 REV.	D	核對 CHECKED	Boris 2016/07/21	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Boris 2016/07/21	
公差 TOLERANCE	.X ±0.38 .XX ±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		