

MATERIAL

Insulator: Nylon 9T, UL94V-0
Contact Pin: Brass

ORDER INFORMATION

5PH2SDA20-4XXXXNNU-AB000-00

4:Quad Row

No. of contacts
Per Row(01~50)

G0:Gold Flash

GA: Au 5u"

GB: Au 10u"

GC: Au 20u"

GD: Au 30u"

T0: Tin Plated

S0: Selective Au

SA: Selective Au 5u"

SB: Selective Au 10u"

SC: Selective Au 20u"

SD: Selective Au 30u"

TE: Tin 200u"

N: Non Type

N: W/O Peg

X: Box

C: Tube With Cap


B: Bag

U: RoHS+Hi-Temp.




EX: 040028000

A: 4.0

B: 2.8

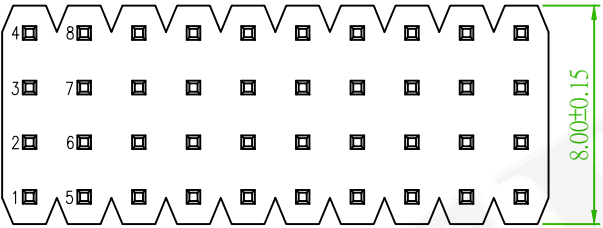

AMTEK 耀德
2023.05.11
Released DCC

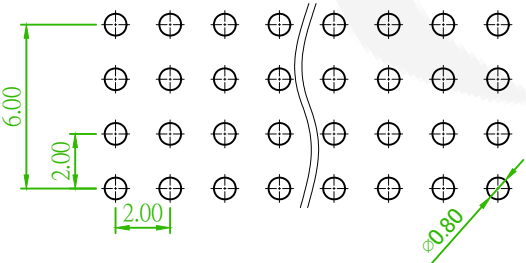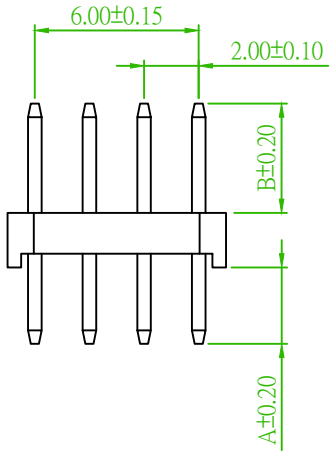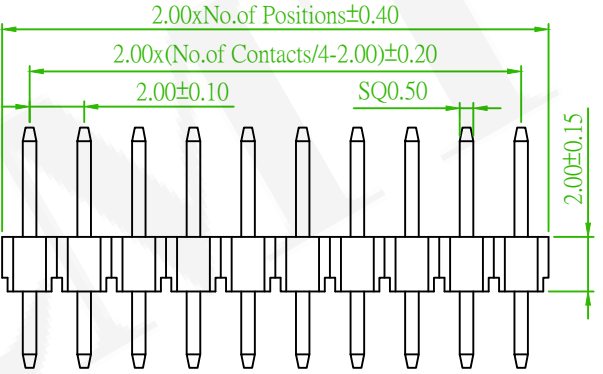

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No. : PH2S20-4XX-U

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 2.0mm PLASTIC HEIGHT 2.0mm DIP STRAIGHT				頁數 Page	1/1
	品號 PART NO.	5PH2SDA20-4XXXXNNU-XXXXXX000-00				繪圖 DRAWN	Mia 2016/09/19
	圖號 DRAWING NO.	GN003-GA262	版本 REV.	C	核對 CHECKED	Jonny 2016/09/19	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/09/19	
	公差 TOLERANCE	.X ±0.38 .XX ±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△x1	ECN NO.:221005 Revise the drawing	Tim	2022/11/10
△	Modify order information	B	2017/02/03 Gary