

MATERIAL 
Insulator:Nylon 9T, UL 94V-0,Black
Contact Pin:Brass

ORDER INFORMATION

5

P

H

2

S

D

A

4

0

-

2

X

X

X

X

N

N

X

U

-

A

B

000

-

0

0

2:Dual Row

No. of contacts
Per Row(02~40)

G0:Gold Flash
GA: Au 5u"
GB: Au 10u"
GC: Au 20u"
GD: Au 30u"
T0: Tin Plated

S0:Selective Au
SA: Selective Au 5u"
SB: Selective Au 10u"
SC: Selective Au 20u"
SD: Selective Au 30u"
TE: Tin 200u"

N:Non Type

N:W/O Peg

U:RoHS
+Hi-Temp.

X:Box
C:Tube With Cap

B:Bag

EX:039028000
A:3.9
B:2.8






AMTEK 糧德

2023.05.11

Released DCC



Recommended PCB Layout
(PCB TOLERANCE ±0.1)

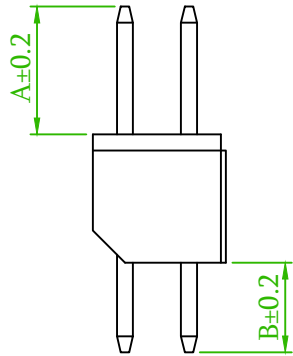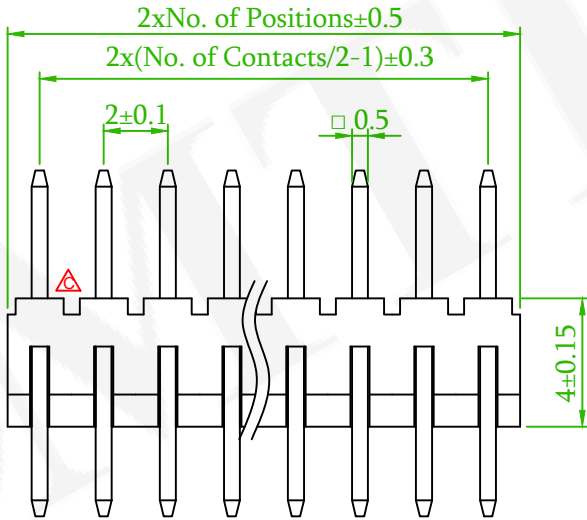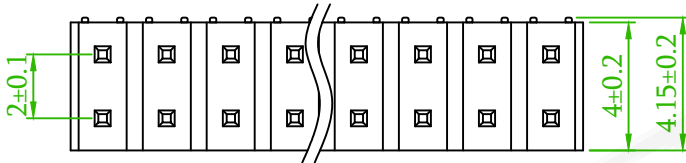

Old Part No. : PH2S40-2XX-U

 X1	ECN NO.:221005 Revise the drawing	Tim	2022/11/10
 X1	QEC NO.:180704,Revise the drawing	Mia	2018/07/12
 X3	Modify order information	Gary	2017/02/03
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE		PIN HEADER 2.0mm D/R V/T DIP TYPE				頁數 Page	1/1
品號 PART NO.		5PH2SDA40-2XXXXNXXU -XXXXXX000-00		繪圖 DRAWN	Athena 2015/08/17		
圖號 DRAWING NO.		GN016-GA257	版本 REV.	D	核對 CHECKED	John 2015/08/17	
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	John 2015/08/17	
公差 TOLERANCE		.X ±0.38 .XX ±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		