

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION

5PH3DDA10-1XX-XX

1:Single Row

No. of contacts
Per Row(02~50)

G0:Gold Flash
GA:5u"

S0:Selective Au
SA:5u"

GB:10u"

SB:10u"

GC20u"

SC:20u"

GD:30u"

SD:30u"

T0:Tin Plated

TE:Tin 200u"

N:Non Type

N:W/O Peg

X:Box

C:Tube With Cap

RoHS

X:Box




C:Tube With Cap

EX:036XXX028
A:3.6
L1:As Required
B:2.8



AMTEK 耀德
2023.10.05
Released DCC

CAP	L	W	H (Ref.)
≥ 1 x 2 Pin	5.0	5.08	4.5

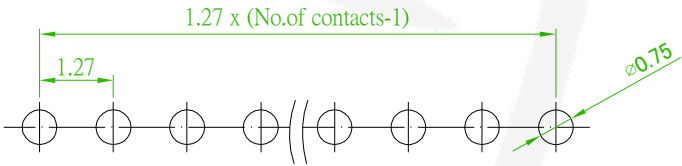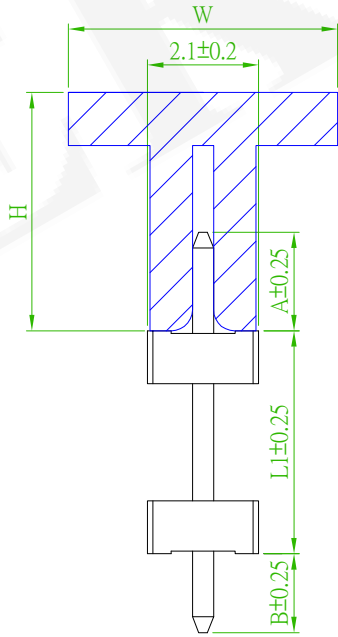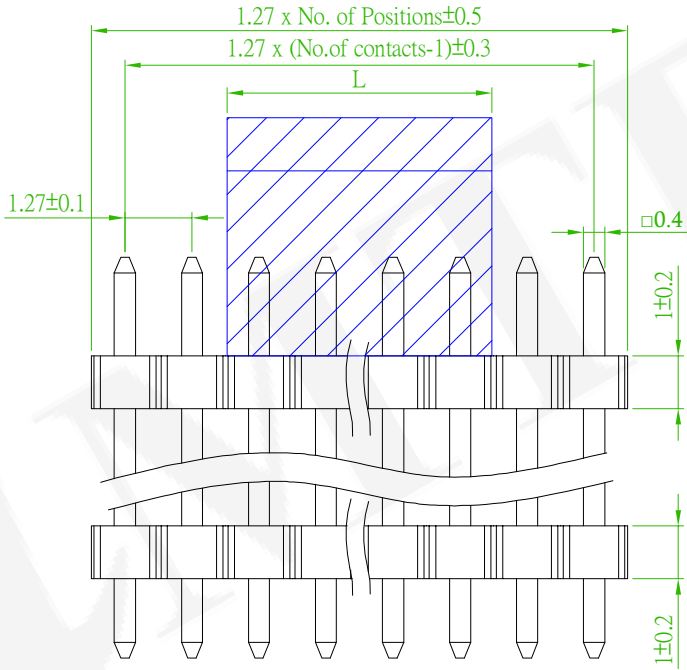

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No. : PH3D10-1XX-U

ECN NO.:230707 Revise the drawing	Alice	2023/08/04
ECN No.:210619 Cancel the top view	Alice	2021/09/15
ECN:170910,Delete the Packing:B:Bag	Kilin	2017/10/31
REV.	ECN NO. OR DESCRIPTION	REVISED DATE



耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 1.27mm				頁數 Page	1/1
品號 PART NO.	5PH3DDA10-1XXXXXXXU -XXXXXXXXXX-00				繪圖 DRAWN	Jeff 2016/09/13
圖號 DRAWING NO.	GN016-GA266	版本 REV.	E	核對 CHECKED	Johnny 2016/09/13	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/09/13	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		