

SPECIFICATION


Current Rating: 1 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 500V AC for one minute
Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Hi-Temp. Thermoplastic, UL 94V-0,Black
Contact Pin: Copper Alloy

ORDER INFORMATION


5 P H 3 D D A 1 5 - 2 X X X X N N X U - A L 1 B - 0 0




AMTEK 糧德

2021.07.28

Released DCC

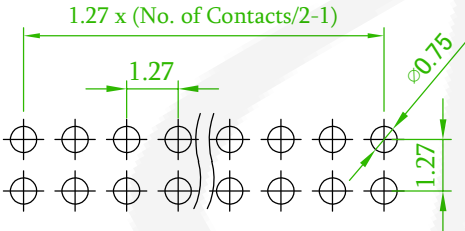

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

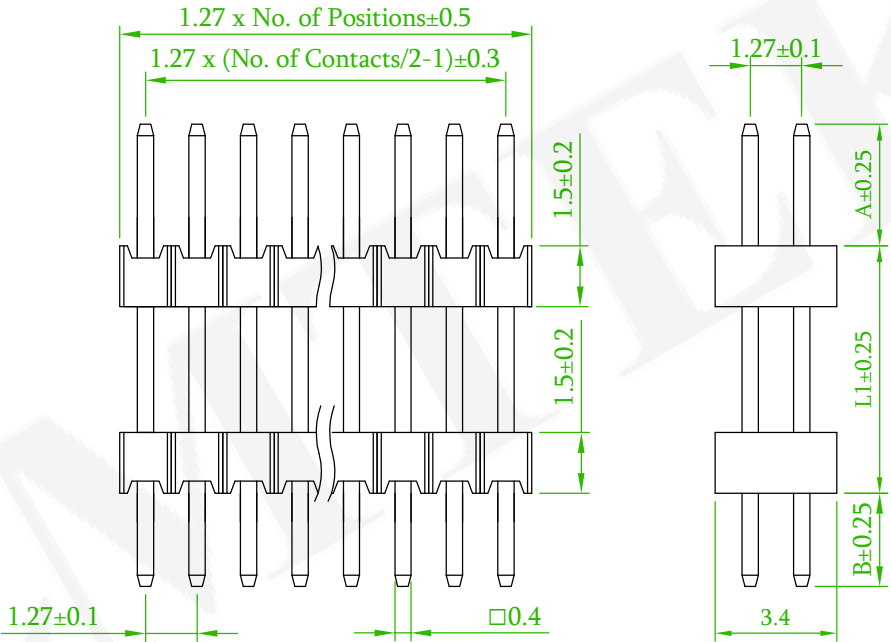

Old Part No. : PH3D15-2XX-U

△x1	ECN No.:210619 Cancel the top view	Benson	2021/07/10
△x1	ECN No.:180310,Remove the Cap & Revise the Package option .	Roy	2018/03/23
△x1	ECN:170910,Delete the Packing:B:Bag	Kilin	2017/10/31
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE		PIN HEADER 1.27mm D/R V/T DIP TYPE			頁數 Page	1/1
品號 PART NO.		5PH3DDA15- 2XXXXNNXU-XXXXXXXXXX-00			繪圖 DRAWN	Roy 2015/08/19
圖號 DRAWING NO.		GN016-GA268	版本 REV.	E	核對 CHECKED	Josh 2018/03/23
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Jason 2018/03/23
公差 TOLERANCE		.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION	