

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass


ORDER INFORMATION

5 P H 3 D D A 1 7 - 2 X X X X X X X U - A L 1 B - 0 0

2: Dual Row	No. of contacts Per Row(02~50)	G0: Gold Flash GA: 5u" GB: 10u" GC: 20u" GD: 30u" TD: Tin Plated	S0: Selective Au SA: 5u" SB: 10u" SC: 20u" SD: 30u" TE: Tin 200u"	N: W/O Peg	N: Non Type	RoHS	X: Box	EX: 036XXX028 A: 3.6 L1: As Required B: 2.8
-------------	-----------------------------------	---	--	------------	-------------	------	--------	--



AMTEK 耀德
2023.10.05
Released DCC

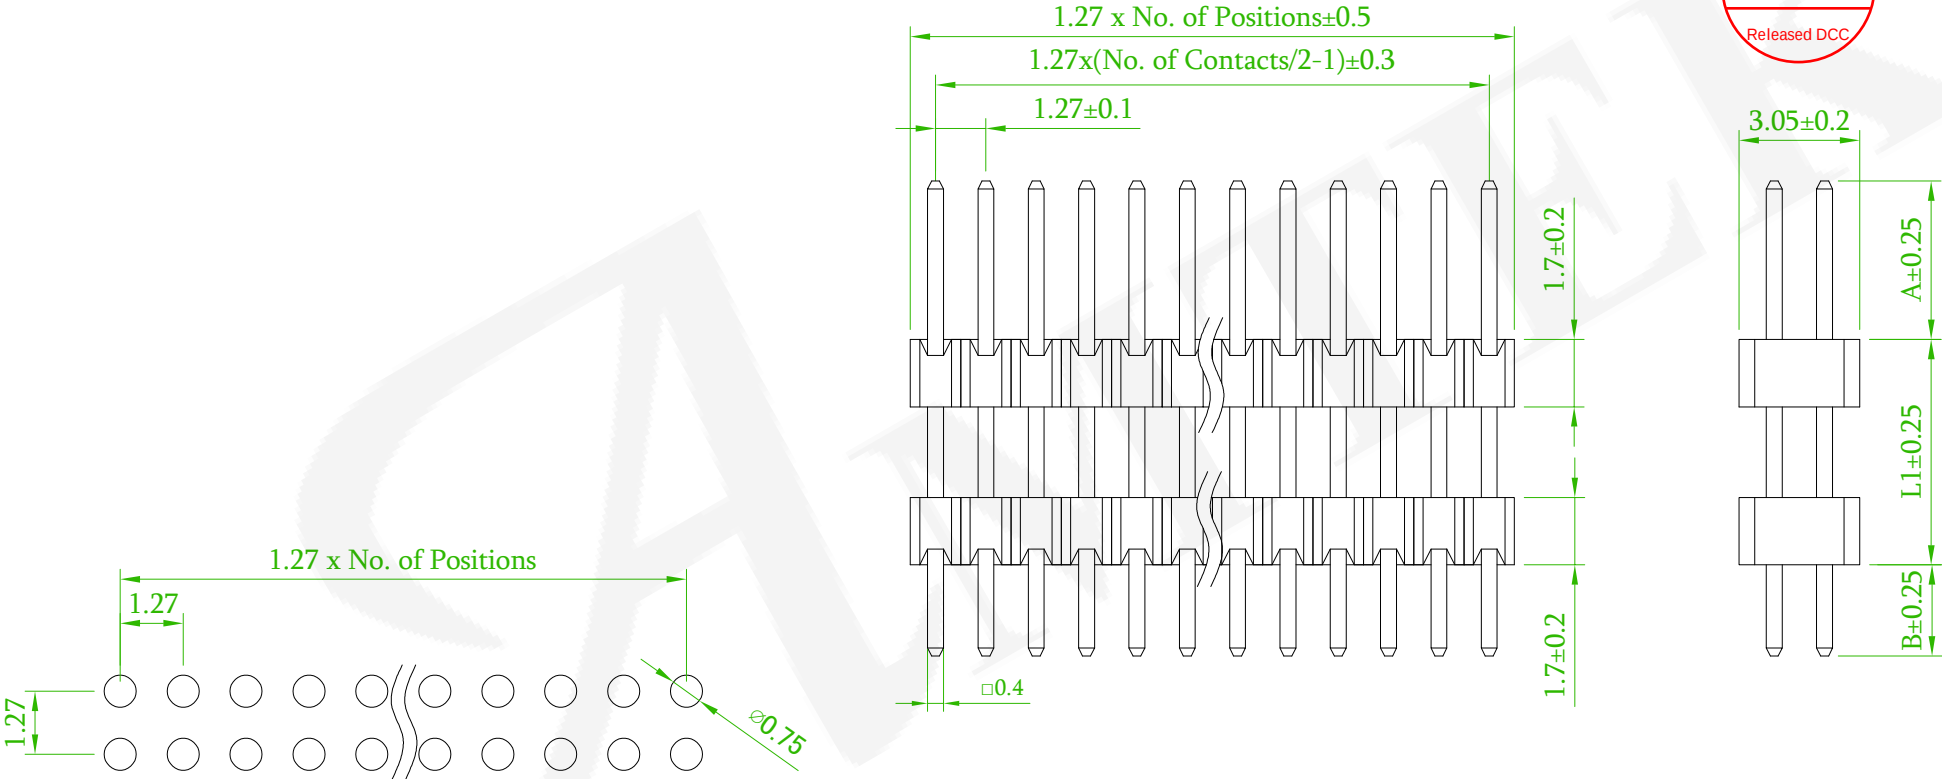

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old P/No : PH3D17-2XX-U

F x2	ECN NO.:230707 Revise the drawing	Alice	2023/08/04
E x1	ECN No.:210619 Cancel the top view	Alice	2021/09/15
D x1	ECN No.:180310, Remove the Cap & Revise the Package option .	Roy	2018/03/23
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 1.27 mm D/R V/T DIP TYPE				頁數 Page	1/1
品號 PART NO.	5PH3DDA17- 2XXXXXXXXXU-XXXXXXXXXX-00				繪圖 DRAWN	Kent 2004/09/09
圖號 DRAWING NO.	GN003-GA010	版本 REV.	F	核對 CHECKED	Josh 2018/03/23	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/03/23	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		