

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION

5PH3DDA20-1XX-XX


1:Single Row	No. of contacts Per Row(02~50)	G0:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u" T0:Tin Plated	S0:Selective Au SA:5u" SB:10u" SC:20u" SD:30u" TE:Tin 200u"
--------------	-----------------------------------	---	--

XX XU - AL1B - 00

N:Non Type	RoHS	EX:036XXX028 A:3.6 L1:As Required B:2.8
N:W/O Peg	X:Box	



AMTEK 耀德
2023.10.05
Released DCC

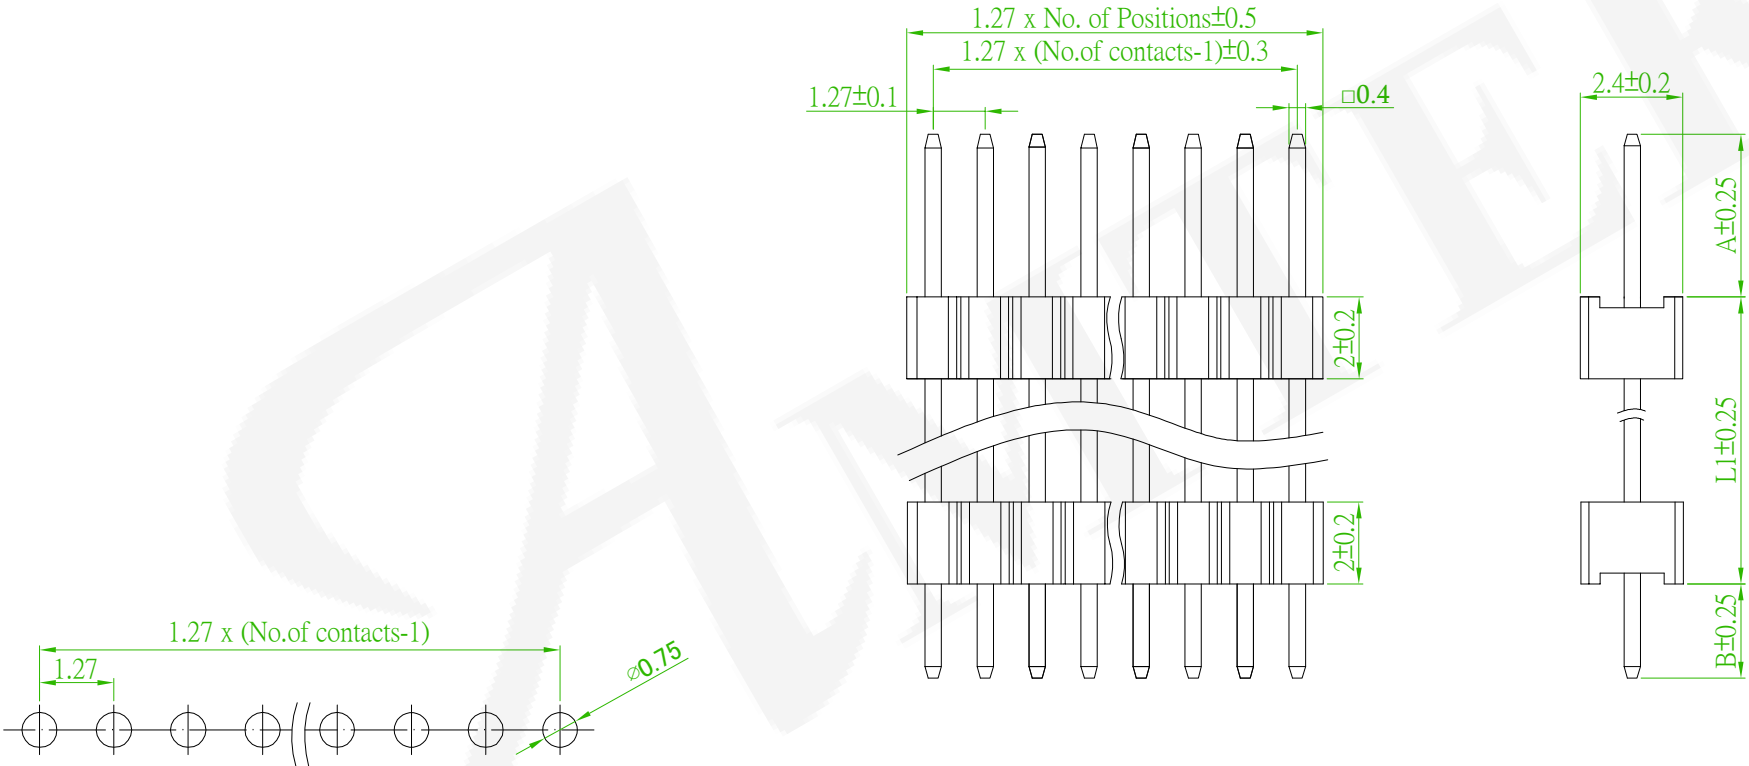

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No. : PH3D20-1XX-U

Rev. A2	ECN NO.:230707 Revise the drawing	Alice	2023/08/04
Rev. E1	ECN No.:210619 Cancel the top view	Alice	2021/09/15
Rev. A1	ECN No.:180310,Remove the Cap & Revise the Package option .	Roy	2018/03/23
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE		PIN HEADER 1.27mm S/R V/T DIP TYPE			頁數 Page	1/1
品號 PART NO.	5PH3DDA20-1XXXXXXXU -XXXXXXXXX-00	繪圖 DRAWN	Jeff	2016/09/13		
圖號 DRAWING NO.	GN016-GA269	版本 REV.	F	核對 CHECKED	Josh	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		